
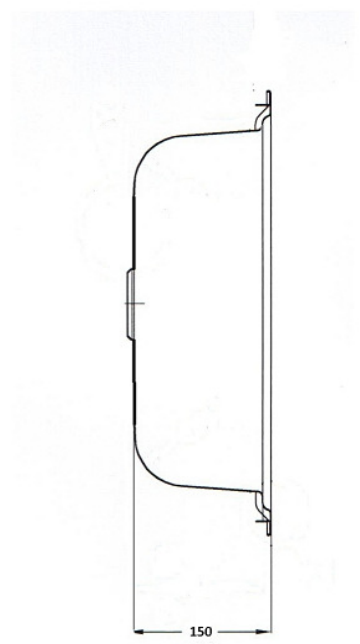
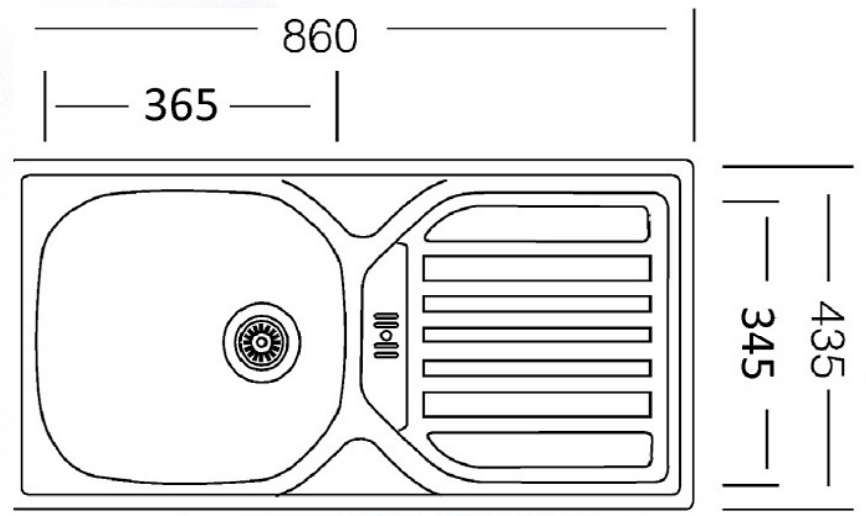


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34

00.7100.23

Dopustni odstopki netoleriranih dolžinskih mer v mm ISO 2768								
Razred točnosti	Področje imenskih mer v mm							
	0,5 do 3	>3 do 6	>6 do 30	>30 do 120	>120 do 400	>400 do 1000	>1000 do 2000	>2000 do 4000
f (fina)	±0,05	±0,05	±0,1	±0,15	±0,2	±0,3	±0,5	-
m (srednja)	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2

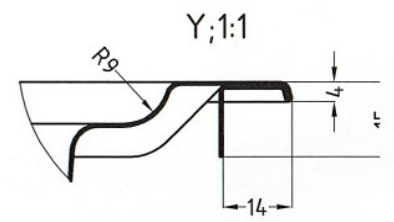

				Pripadnost:		Obdelava	
				Netol.mer. ISO 2768-m	Netol.koti ISO 2768-m	Materijal: SIST EN 10088-2 1.4301+2R	Masa
				Konstr.	12.1.99		Kosov
O1	03.11.2009	D.Mlakar					
C1	19.3.09	Ožbolt P.	PREJ 145-PREJ 160				
B1	1.3.06	Ožbolt P.	Nova izvedba (ECONOMIC)	Risal			
A0	12.1.99	Ožbolt P.	1. izdaja	Pregled.			
Ozn.	Dne	Ime	Sprememba	Odobril			
Naziv						Koda:	
Einbauspüle SPEED SP 860.430						448292	
Klasifikac.štev.						Nadomešča:	

42

1/1