

111 Classic e-Motion

INSTRUCTION MANUAL



4 PILLARS

THANK YOU FOR PURCHASING THE 111 Pergola e-Motion



This manual will provide you with clear and detailed instructions on how to safely and correctly assemble and maintain your pergola, to ensure it brings you many years of use and enjoyment.

IMPORTANT

Warning: Important safety instructions. It is important for the safety of persons to follow these instructions. Save these instructions.

This product can be used by children ages from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the product in a safe way and understand the hazards involved. Children shall not play with the product. Cleaning and user maintenance shall not be conducted by children without supervision of an adult.

Intended use

This pergola is intended for outdoor domestic use in residential environments, and to protect users from direct sunlight, glare and heat.

Any use or modification to the pergola not included in this manual shall be considered as improper use, which may cause considerable danger to users and property and will void the product warranty.

TABLE OF CONTENTS

- Before Assembling Your Pergola	3
- Important Safety Advice	5
- Technical Data	8
- List of Parts	9
- Assembly	11
- Operation of Your Pergola	31
- Problem Solving, Care & Maintenance	33
- Warranty & Complaints Procedure	36
- Disassembly & Disposal of the Product	37
- Certification Information	38

BEFORE ASSEMBLING YOUR PERGOLA

WARNING: Important safety instructions. Follow all instructions, since incorrect assembly can lead to severe injury.

Make sure you have all the tools required for assembling your pergola:

In order to assemble your pergola safely and correctly, please ensure you have access to the following tools and accessories, all of which are not provided.



Hard hat



Protective gloves



Box cutter




Tape measure



Leveler



Phillips screwdriver



Cordless screwdriver



Hexagonal spanner/
wrench set



Hammer drill



Hammer



2 step ladders



Scissors

Check to ensure there are no missing parts:



Before you begin assembly, please check that you have all the parts required to assemble your e-Motion. Please also carefully check that the quantity of parts match with that of the model you have purchased.

If any parts are missing, please refer to the **Warranty & Complaints Procedure** to contact customer service before beginning the assembly.

Prepare the parts you will need for each step:

In the **Assembly** section of the manual, each step indicates the necessary parts and quantities required to complete the step. We recommend that you prepare the parts you will need for each assembly step. Doing this will save you time and effort during assembly. If possible, place the parts on cardboard or other soft surface to protect from scratching the painted surfaces.

Select a suitable location:

The ground should be solid and flat	The ground should be level	Sufficient water drainage	Easy access to power	No overhanging trees and powerlines
				
				

Warning:

Most terraces or patios are designed with a slight slope to prevent (rain) water from forming pools or reaching the house or other structures. For the perfect pergola installation, a level concrete surface without such a slope is required. Small pebbles could also prevent the pergola from being safely secured on the ground.

If the pergola is installed on an uneven surface, it may prevent accessory components from working correctly and may void the product warranty.

Prepare a foundation:




To prepare it, you need to:




- check for underground pipes and cables (Call 811 before you dig if you live in the USA)
- check with your local authorities regarding any building permits that may be required
- contact a reliable contractor to install a concrete base if you don't have one


Do not assemble the pergola on sandy, muddy or loose soil, as the stakes do not have the sufficient anchorage to be installed in these types of soil.

IMPORTANT SAFETY ADVICE

For the safety of all persons assembling and using the pergola, it is important to follow the safety guidelines below.

The pergola must be positioned and fixed on flat level surface.	Always wear appropriate work shoes, gloves and eye protection when working.	Work well away from power lines, particularly when handling metal parts.	If using power tools or a ladder, always follow the manufacturer's safety instructions.
			
Make sure the pergola complies with local building regulatory codes.	Working at heights can be dangerous. Always wear protective clothing to prevent injury in the event of a fall.	Only use ladders and scaffolding with a sufficiently high load bearing capacity.	Before installing the drive, remove any unnecessary cords and disable any equipment not needed for powered operation.
			

Hazardous unprotected moving parts of the drive shall be installed higher than 2.5m above the floor or other level that could provide access to it.	Keep clothing and body parts away from the pergola to prevent them from getting caught in the moving parts.	Foliage or other foreign objects on the louvers and in the guide rails should be removed regularly, to prevent damage to the pergola.	Put the louvers into the vertical position during snowfall or wind to avoid damage.
			
Only use replacement parts that are approved by the manufacturer.	Electrical installation may only be carried out by certified personnel according to the applicable regulation. (e.g. VDE 100 for Europe)	Make sure all electrical connections are disconnected from the mains during installation.	Electric pergolas should only be connected to power sources that have been installed by a licensed electrical contractor.
			
The pergola should only be remote controlled when you have a full view of the moving parts.	Repeated open-close operations may cause the motor to enter overheat protection mode. It will resume normal operation once the temperature decreases.	Dispose of all plastic bags safely. Keep them out of the reach of children.	
			

Keep children and pets away from the assembly area until the work is completed.	Changes to the design or configuration of equipment may not be made without consulting the manufacturer or authorized representative.	Prior to each operation, visually check the pergola for damage. If damage is visible, stop using it immediately and contact authorized personnel to repair the damage.	If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified people in order to avoid a hazard.
			
Do not climb on the louvers.	Do not attempt to assemble the product if you are tired, or after consuming alcohol.	Do not place anything on the louvers.	Do not attempt to assemble the pergola in windy or wet conditions.
			
Do not start the roof mechanism in case of frost or ice build-up, as it may damage the drive of the louvers.	Do not allow children to contact the fixed controls. Keep remote controls away from children.	Hanging objects on the pergola may cause serious damage and is not permitted.	Hot items such as recently used grills, fire pits etc. must not be stored under or close of the pergola.
			


TECHNICAL DATA



Pergola	Continuous Operating Cycle	10 cycles
	Sound Pressure Level	≤70 dB
	IP Rating	IPX5
	Wind Resistance	Class 6/ 9 BFT
Linear Actuator	Input Voltage	24V DC
	IP Rating	IP66
Control Box	Input Voltage	24V DC
	Output Voltage	24V DC
	IP Rating	IPX5
Light LED Strip	Input Voltage	24V DC
	Wattage Per Meter	11W/m
	IP Rating	IP68
Power supply	Input Voltage	110 to 240V
	IP Rating	IP67
	Maximum Power	350VA
Control	Control Method	Remote Control
	Remote Control Frequency Band	2400MHz~2483MHz
	Remote Control Max Transmit Power	0dBm



LIST OF PARTS

PLEASE NOTE that the anchor bolts provided may not be suitable for your chosen installation location. Please check before proceeding.

DO NOT USE AN IMPACT CORDLESS SCREW DRIVER TO ASSEMBLE THE PERGOLA. USE A STANDARD CORDLESS SCREW DRIVER ON THE BASE SETTING. ALL HOLES HAVE BEEN PREDRILLED OR FITTED FOR ASSEMBLY.



REF	Part name	Length		
		3m/10ft.	3.6m/12ft.	4m/13ft.
A	 Standard corner pillar	3	3	3
A2	 Cabled corner pillar	1	1	1
B1	 Side beam with motor	1	1	1
B2	 Side beam without motor	1	1	1
C	 End beam	2	2	2
D	 Louver	19	23	25
G	 Connecting strip	2	2	2
I	 Foot plate cover	4	4	4

	REF	Part name	3m 10ft.	3.6m 12ft.	4m 13ft.		REF	Part name	3m 10ft.	3.6m 12ft.	4m 13ft.
J		Foot plate	4	4	4	W		Anchor bolt M8x80mm	16	16	16
K		Louver end cap	37+2	45+2	49+1	X		Hex key (small)	1	1	1
L		Louver end cap with control arm	1	1	1	Y		Hex key (large)	2	2	2
M		Shaft support cover	38+2	46+2	50+2	Z		12mm SDS Plus Drill Bit	1	1	1
N		Pillar cover	4	4	4	Z4		Power supply	1	1	1
						Z5		LED light strip	2	2	2
O		Screw ST5.65x 45mm	24+2	24+2	24+2	Z6		Remote control	1	1	1
P		Screw M5x 12mm	76+4	92+5	100+5	Z7		2.4G Antenna	1	1	1
Q		Screw 4.2x 25mm	76+4	92+5	100+5	Z8		Waterproof tape	1	1	1
R		Screw 5.5x 19mm	12+2	12+2	12+2	Z9		Screw ST4.8x 13mm	4	4	4
S		Cotter pin	38+6	46+7	50+8	Z10		Spare plastic pin	0+10	0+10	0+10

Assembly

1. Set up the corner pillars



Assembly Video





1A

Fix the cable flange with screws **Z9** onto the cabled corner pillar **A2**, and make sure the cable is hanging outside.

Z9 x 4





A2 x 1

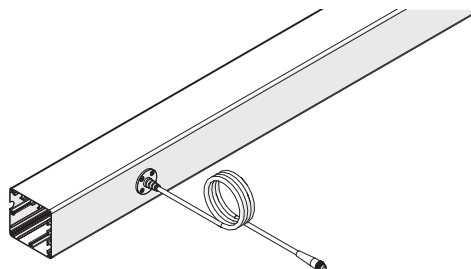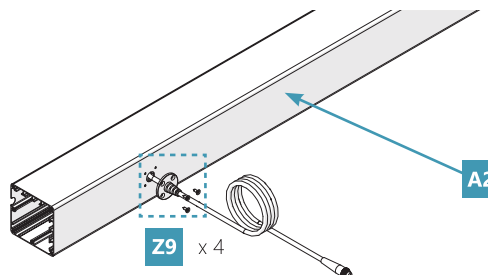

1B

Slide the foot plate cover **I** with its wide opening facing outwards on the straight end of the cabled corner pillar **A2**.

I x 1

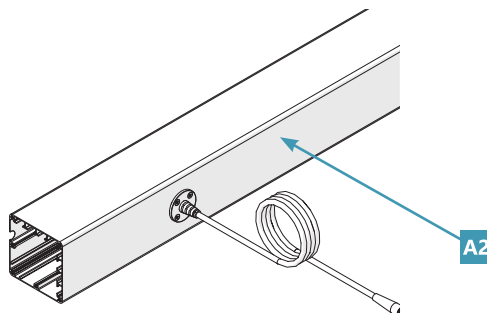





1C


Push the foot plate **J** against the straight end of the cabled corner pillar **A2**. It only fits in one direction and in one position. If in doubt, rotate it until it fits easily.

Screw in the foot plate **J** with 6 screws **O**.

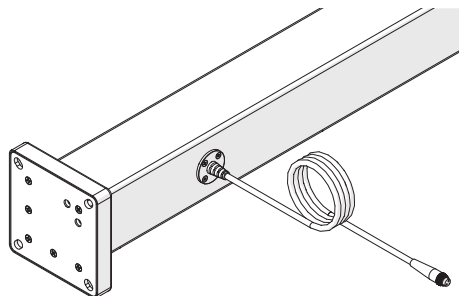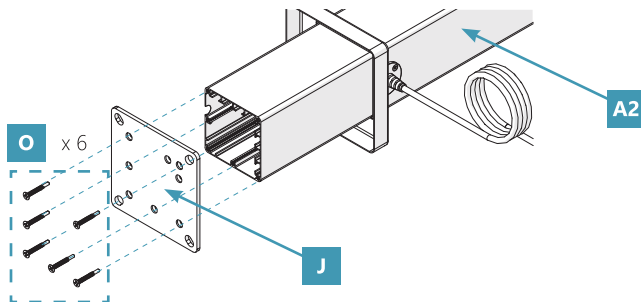


1D

Repeat steps **1B** – **1C** to assemble the foot plates **J** of the 3 standard corner pillar **A**.



x 3

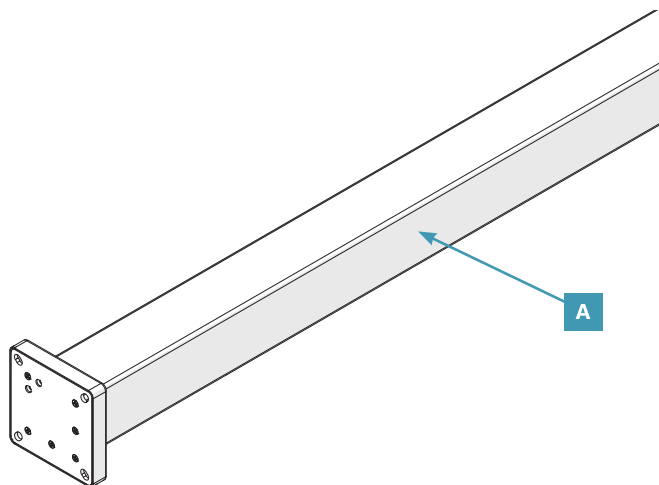


2. Connect the side beam with motor **B1** to the cabled corner pillar **A2** and a regular corner pillar **A**

2A

Pull out the cable at the end of the side beam with motor **B1** through the small cut-out.

B1 x 1

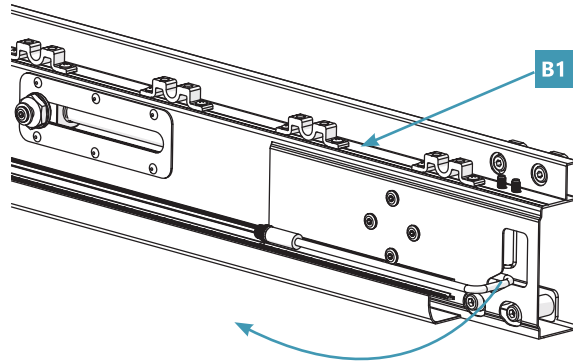


2B

Using a hex key (large) **Y**, slightly loosen the 8 built-in screws at the both ends of the side beam with motor **B1** (4 on each side).

Y x 1





B1 x 1

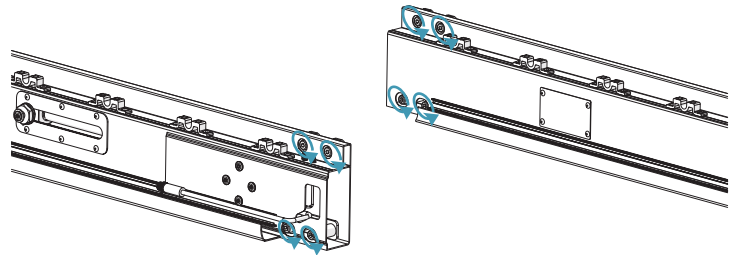

2C


Lay two corner pillars (**A** & **A2**) and place the side beam with motor **B1** on the ground as shown in the picture.

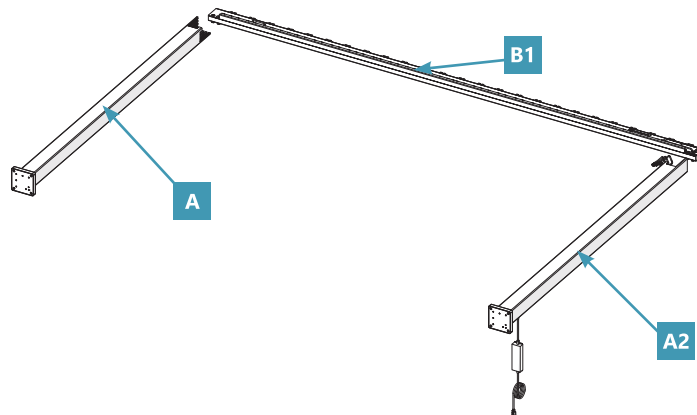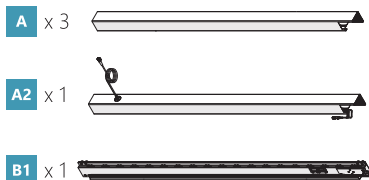

2D



Side beam with motor **B1** into the grooves of the corner pillars (**A** & **A2**) in such a way that the slot nuts of the side beam with motor **B1** interlock with the slots in the corner pillars (**A** & **A2**).

Warning:
Pull the cables out of the cabled corner pillar. Take care not to crush or squeeze the cables.

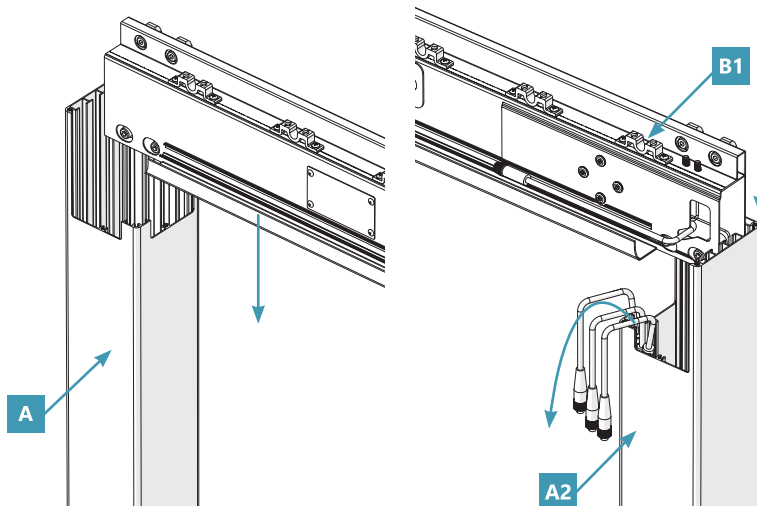

2E


Tighten the 8 screws (4 on each side)
with the hex key **Y**.

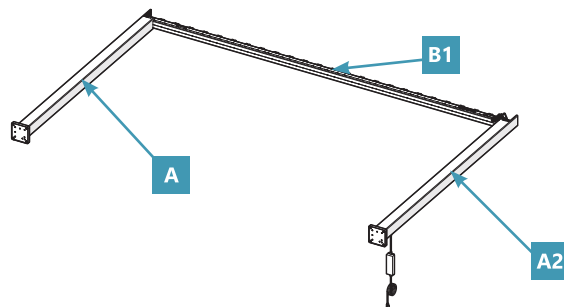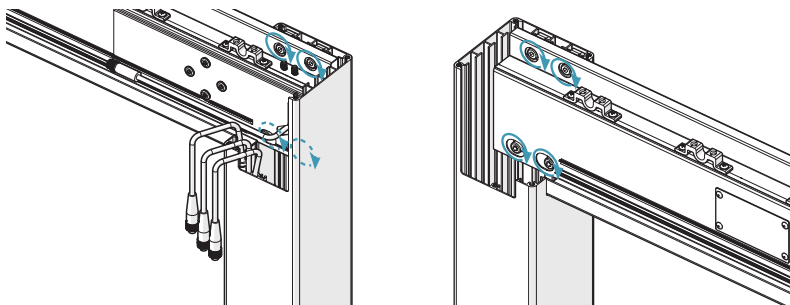

3. Connect the side beam without motor **B2** to the remaining two regular corner pillars **A**

3A

Repeat steps **2B** - **2E** to connect
the beam without motor **B2** with the
remaining two corner pillars **A**.

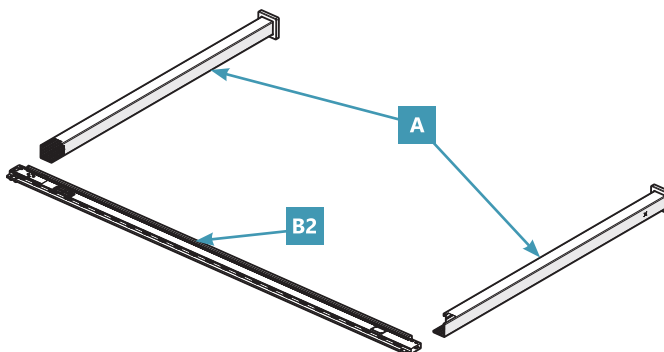

4. Slide in the two end beams

This phase requires four persons and at least two stepladders.
Make sure that the stepladders are standing securely to avoid falling.

Only use ladders suitable for this kind of assembly work.




4 PEOPLE REQUIRED

4A

Stand the two structures built during steps 2 and 3 in an upright position, and place them at one end beam length away from one another. Make sure that one person is supporting each corner leg (**A** & **A2**) to prevent the structures from falling.


Reminder:

When determining the installation direction of the product, please consider the opening direction of the louvers as well as the desired sunshade effect.

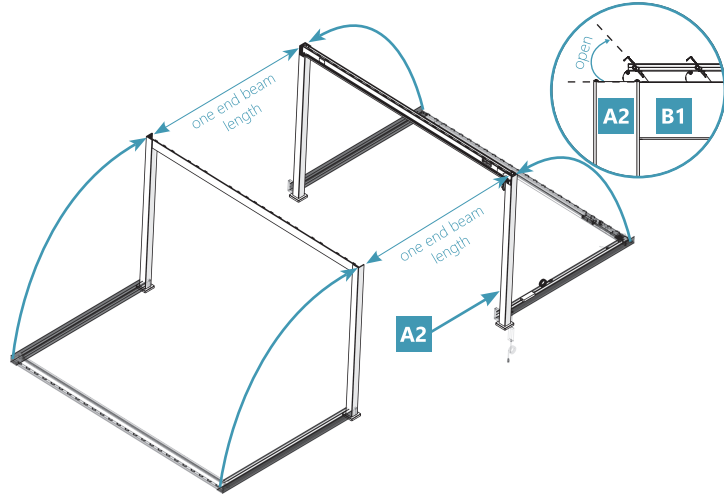


4B

Slightly loosen the 8 built-in screws at both ends of the end beam **C**.




x 8

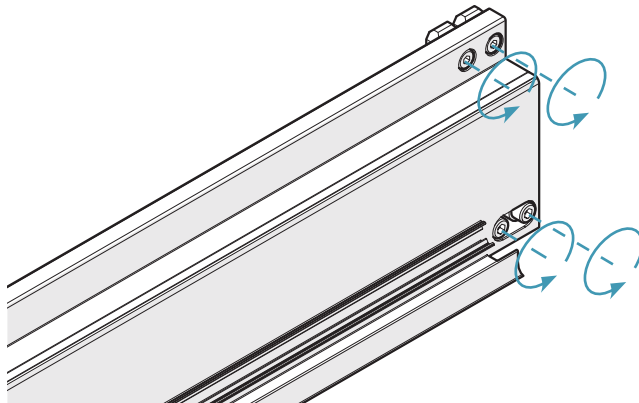

4C

Slide the slot nuts of the end beams **C** from above into the slots of the corner pillars **A**.

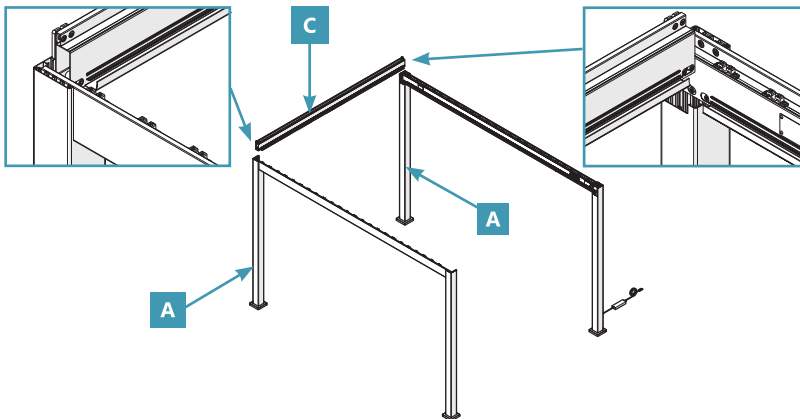


C x 1



4D

Once the beam is in the correct position, tighten the 8 built-in screws on both ends using the hex key **Y** provided.

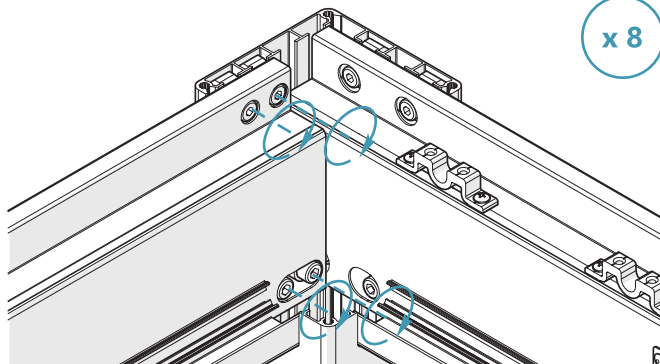


Y x 1



4E

Install the other end beam **C** by repeating steps **4B** - **4D**.

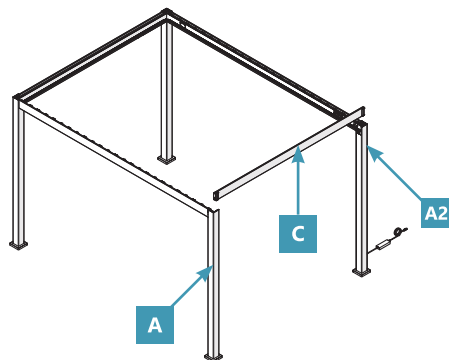

Y x 1



C x 1




5. Install the LED strip lights

5A

Place both LED light strips **Z5** along the grooves on the side beams (**B1** & **B2**) and end beams **C**, as shown in the figure. Put the connection socket of the LED light strip **Z5** close to the cabled corner pillar **A2**, and put the end of the LED light strip **Z5** into the top of the corresponding corner pillar if needed.


Z5 x 2

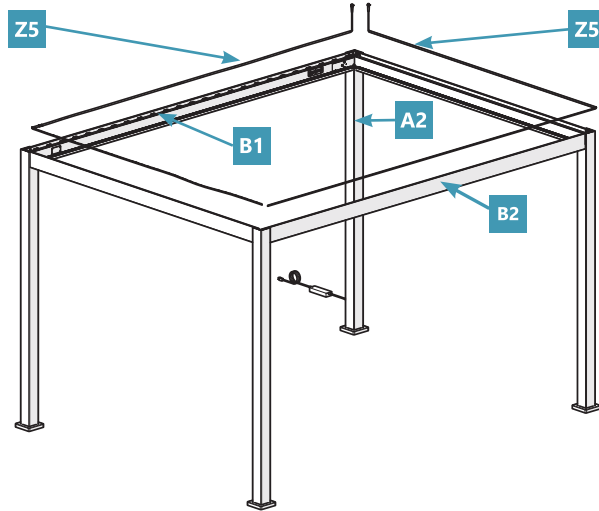

5B

As shown in the figure, press both LED light strips **Z5** firmly into the light strip slots one by one to ensure they are fitted evenly.

Z5 x 2

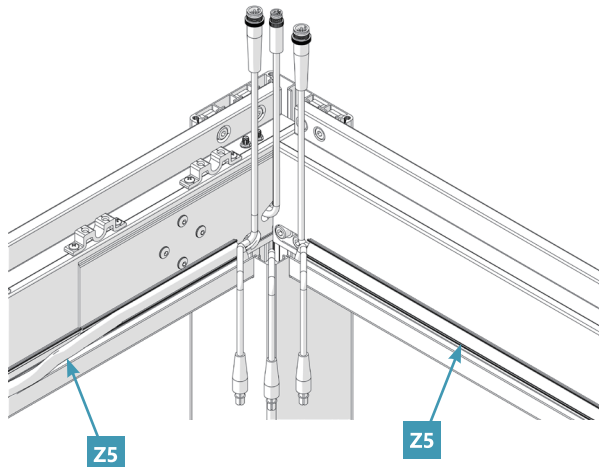


6. Connect the power cables of the motor and LED strip lights Z5

6A


Connect the cable connector (5-pin) of the side beam with motor **B1** into the corresponding connector socket on the top of the cabled corner pillar **A2**. Then tighten the waterproof connector.

Connect the cable connector (4-pin) of the LED light strip **Z5** into the corresponding connector socket on the top of the cabled corner pillar **A2**. Then tighten the waterproof connector (there is no need to differentiate the plug sockets of the two light strips as they are the same).

- Z5** x 2 
- Z8** x 1 
- B1** x 1 
- A2** x 1 


Tip:

It is recommended to wrap waterproof adhesive tape on the waterproof connectors to prolong their service life.

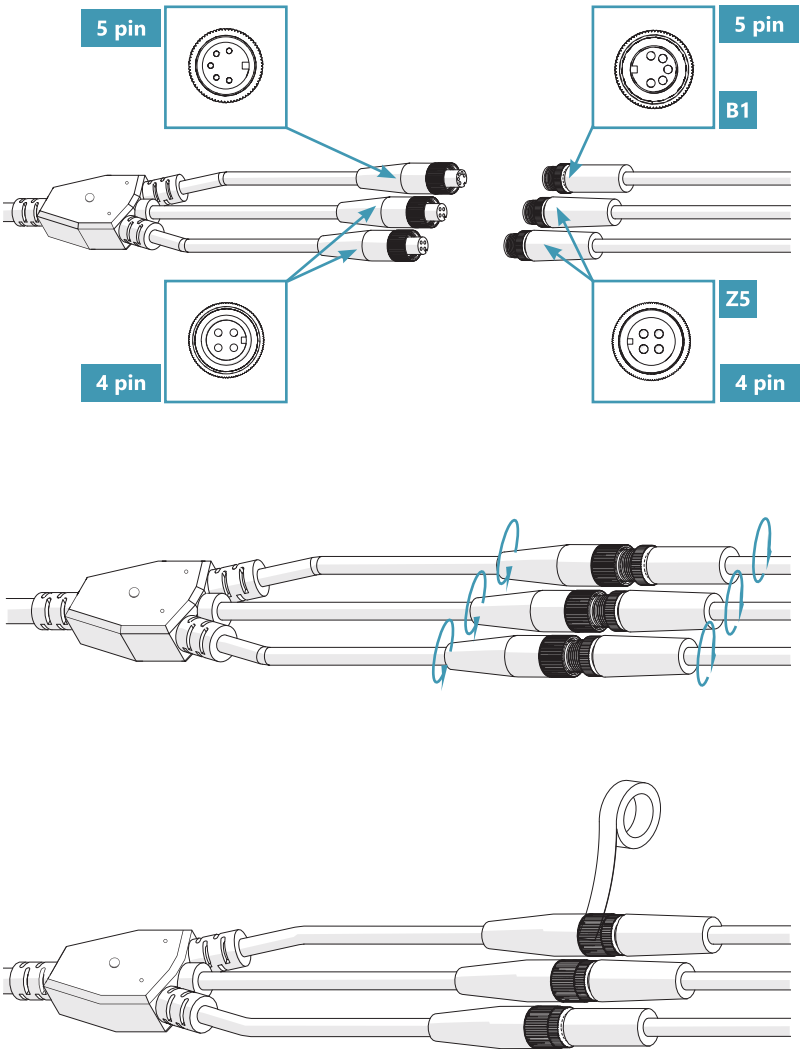

6B

Carefully tuck all connected cables and connectors at the top of the structure back into the corner pillar.

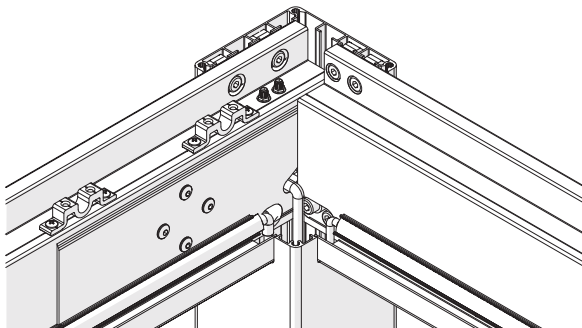

7. Check the alignment of the frame and the distance between the corner pillars

You are now almost done assembling the main frame of the pergola. Please double check to ensure all corner pillars, beams, and cables have been assembled and fitted correctly. You may have to unscrew certain bolts during this step.

You will also need a tape measure and a leveler to complete this step.

7A




Choose one of the corner pillars (**A** & **A2**) and work from this pillar.

Choose this pillar carefully as it will define the final installation location of the pergola.

Use a leveler to measure against both of the inner sides to ensure that the corner pillar is straight and level.

Make sure this corner pillar does not move position during the remaining assembly steps.

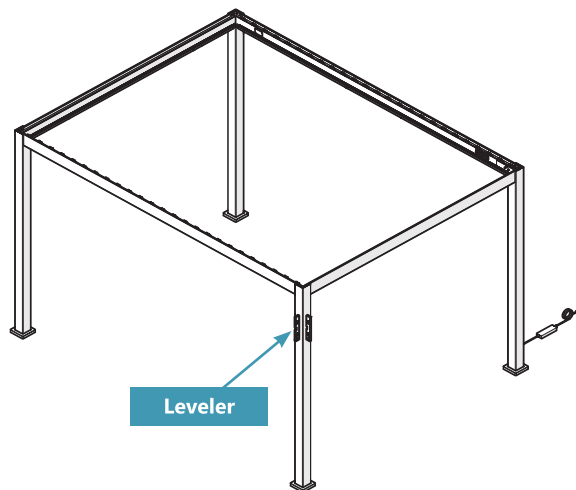




7B

Measure the distances between the adjacent corner pillars. Adjust accordingly and ensure the distances match those shown in the opposite figure.


Size (m/ft)	a		b	
	(mm)	(inch)	(mm)	(inch)
3x3/10x10	2790.5	109.9	2790.4	109.9
3x3.6/10x12	2790.5	109.9	3400	133.9
3x4/10x13	2790.5	109.9	3705	145.9
3.6x3.6/12x12	3400	133.9	3400	133.9
3.6x4/12x13	3400	133.9	3705	145.9

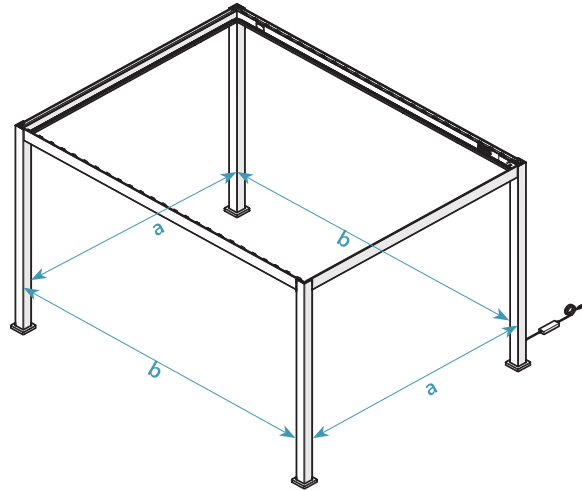

7C

Measure the diagonal distance between the opposite corner pillars. Adjust the other corner pillars accordingly until both diagonal distances are equal. You may have to repeat the above steps after completing the remaining steps.


Size (m/ft)	c	
	(mm)	(inch)
3x3/10x10	3951	155.6
3x3.6/10x12	4403	173.3
3x4/10x13	4643	182.8
3.6x3.6/12x12	4813	189.5
3.6x4/12x13	5033	198.1

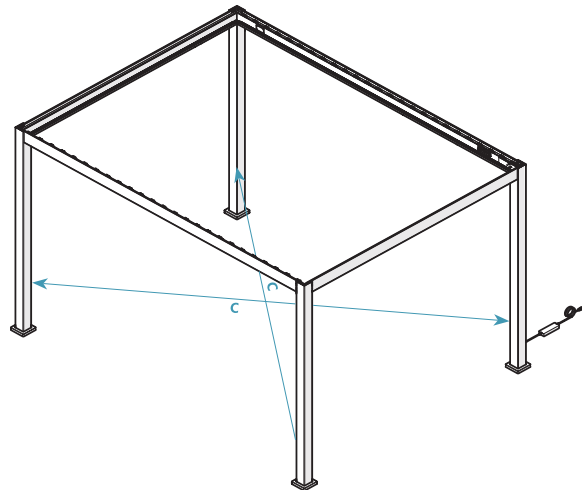




7D

Check that all corner pillars are straight and level using a leveler. If the corner pillars or beams are still not level, this means that your main building surface isn't sufficiently level, and that you will need to raise the corner pillars that are positioned lower than the others. (Contact qualified professional installers if needed.)

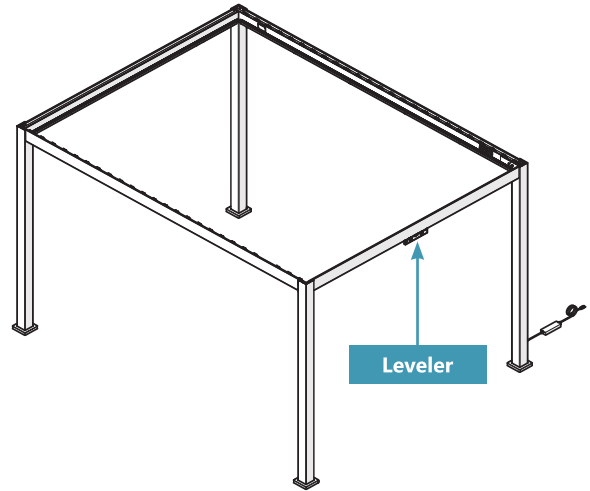

Warning:

If you do not adjust the main structure at this point, you may encounter problems when fitting the louvers and/or accessories to the frame.

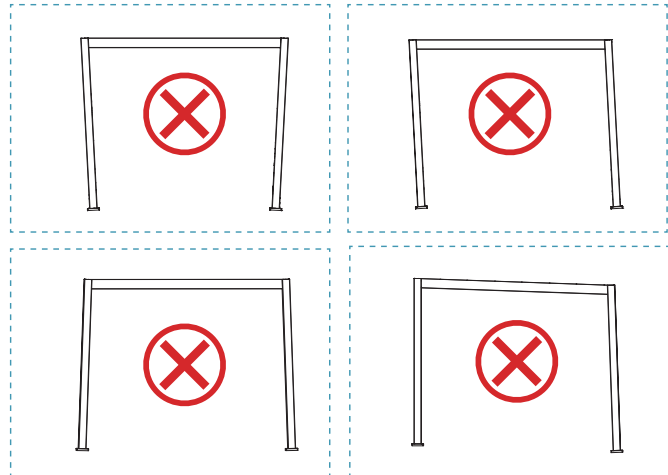

8. Assemble louvers and connecting strip



8A

Prepare the driving louver: select one of the louvers **D** to be the driving louver.

Attach the louver end cap with control arm **L** to one end of the driving louver, and attach a louver end cap **K** to the other end of the driving louver. Use 2 screws **Q** on each side.

Notice:

Do not over tighten or strip out the screws.

L x 1





K x 1



Q x 4



D x 1

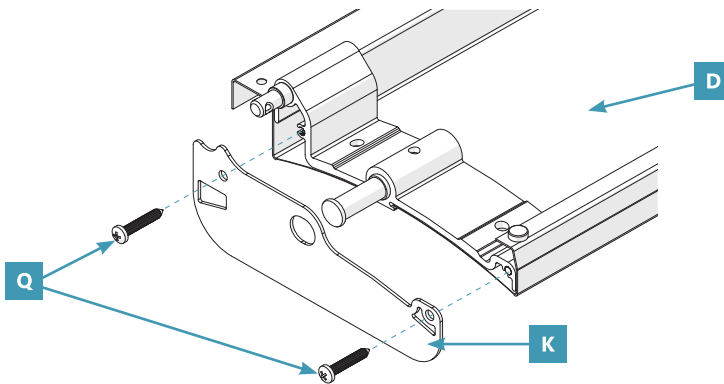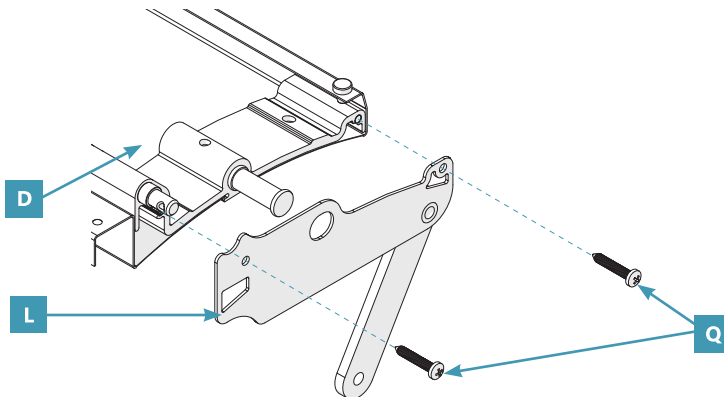





8B

Prepare the regular louvers: attach the louver end caps **K** to each end of the rest of the louvers **D** with 2 screws **Q**.


Repeat this step for all louvers.

Part \ Length	3m/10ft.	3.6m/12ft.	4m/13ft.
K 	36	44	48
Q 	72	88	96
D 	18	22	24

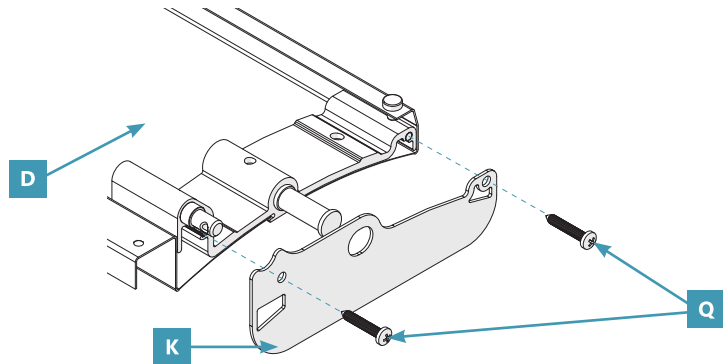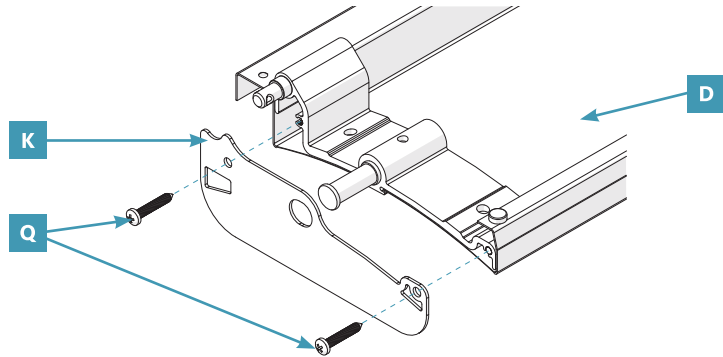



8C

Place the louvers **D** on the corresponding louver shaft support on both side beams (**B1** & **B2**), with each louver overlapping the next, and **make sure that the driving louver is placed 4th from the left.**

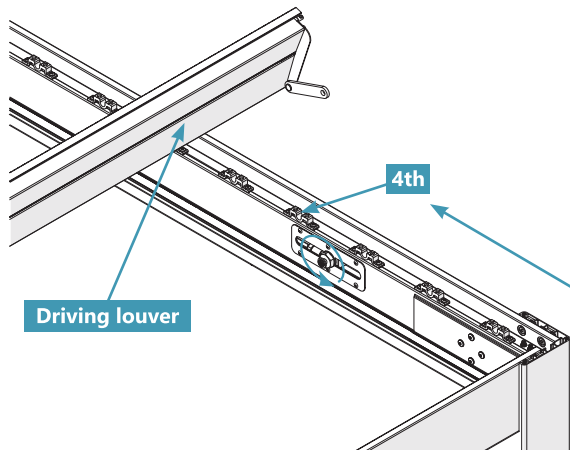

8D

Loosen the screw and washer already attached to the beam with motor. Then fix the connecting rod **L** of the driving louver to the side beam with motor **B1**, by firmly tightening the same screw and washer, using the hexagon socket key **X**.

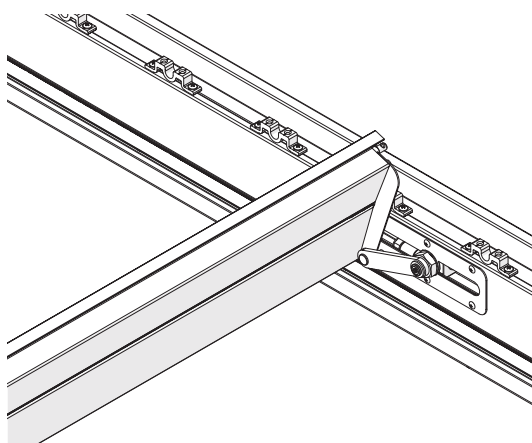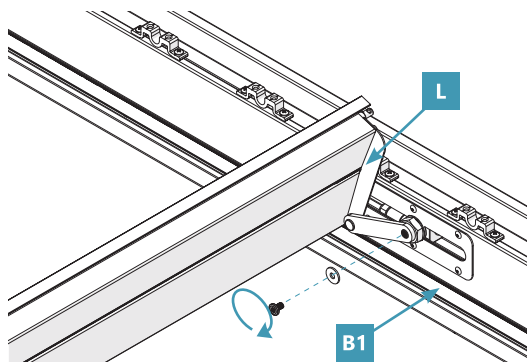

X x 1




8E



Place the rest of the louvers onto the remaining shaft support brackets. Secure the louvers **D** in the shaft support brackets by fixing a shaft support cover **M** onto the shaft support brackets on both ends of each louver **D**. Use 2 screws **P** each and secure them.

Repeat this step for all louvers.

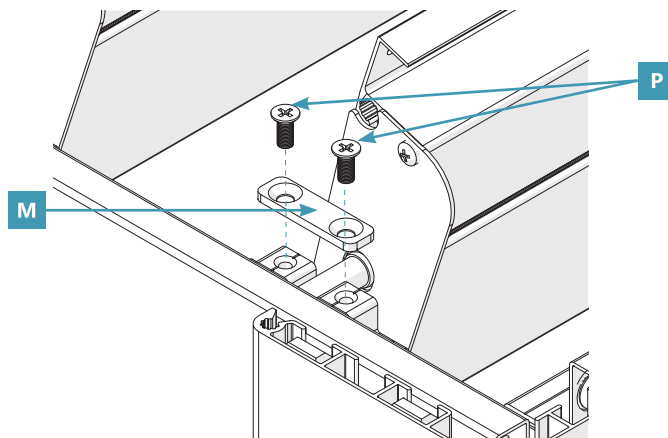




Part \ Length	3m/10ft.	3.6m/12ft.	4m/13ft.
M	38	46	50
P	76	92	100

8F

Attach the connecting strip **G** to each louver by fitting each of the holes onto the corresponding bolts of the louvers. Secure every bolt with a cotter pin **S**, inserting it through the small bolt hole.

Repeat this step for the other side of the louver.

Part \ Length	3m/10ft.	3.6m/12ft.	4m/13ft.
G	2	2	2
S	38	46	50

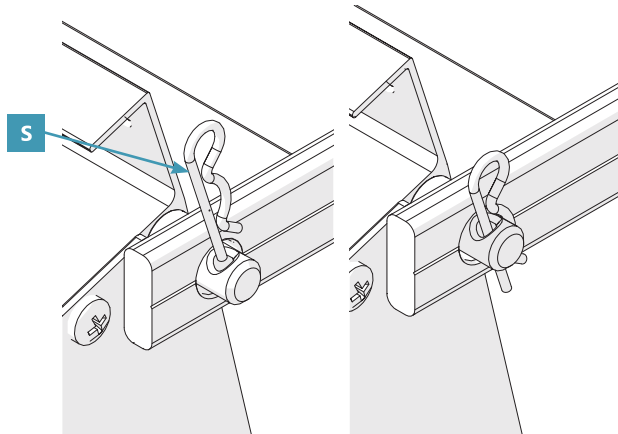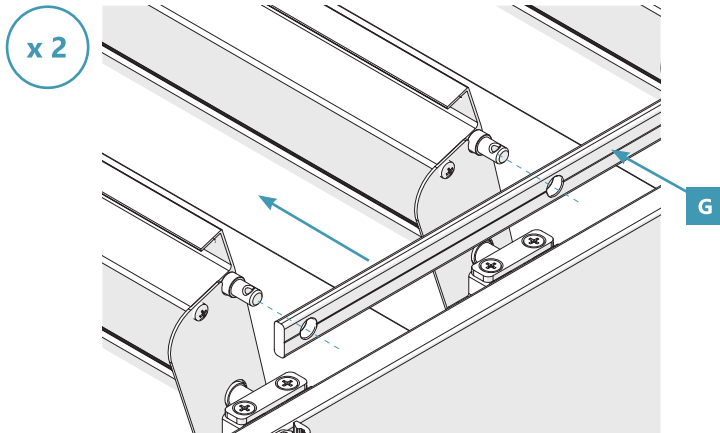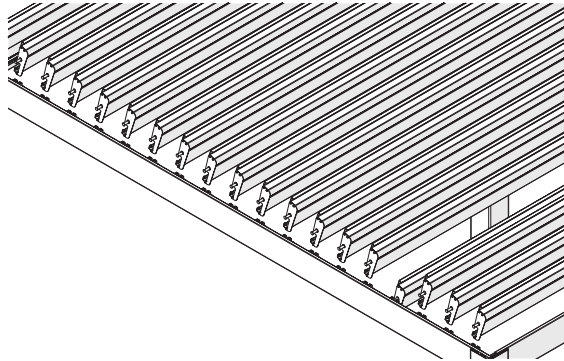


9. Finalize the electric connection and assemble the pillar cover

9A

Assemble the 2.4G antenna **Z7** , and make sure they correspond to the label **B1** on the side beam with motor **B1** .

Z7 x 1 

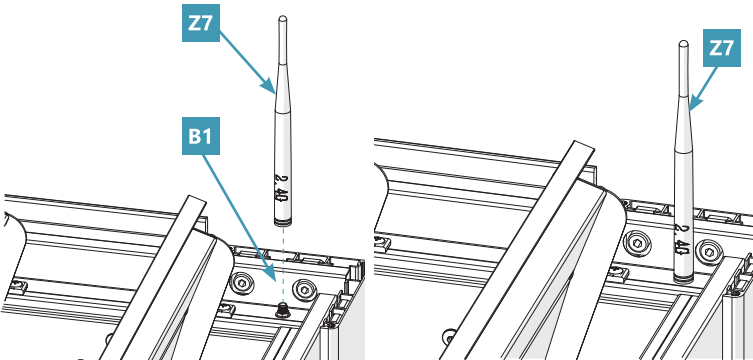

9B





To assemble the pillar cover, fix a pillar cover (**N**) to the top of each corner with 3 screws each **R** .

N x 4 

R x 12 

Tip:

Check the frame alignment and pillar distances again by repeating **7A** - **7D** if necessary.

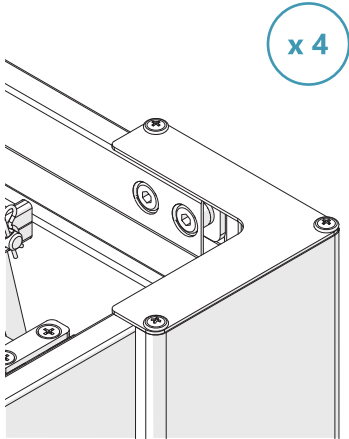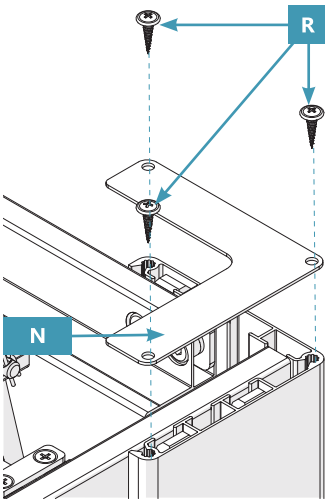


9C

Connect the cable on the base of the cabled corner pillar **A2** to the cable of the power supply adapter **Z4**. Tighten firmly.


Tip:

It is recommended to wrap waterproof adhesive tape on the waterproof connectors to prolong their service life.

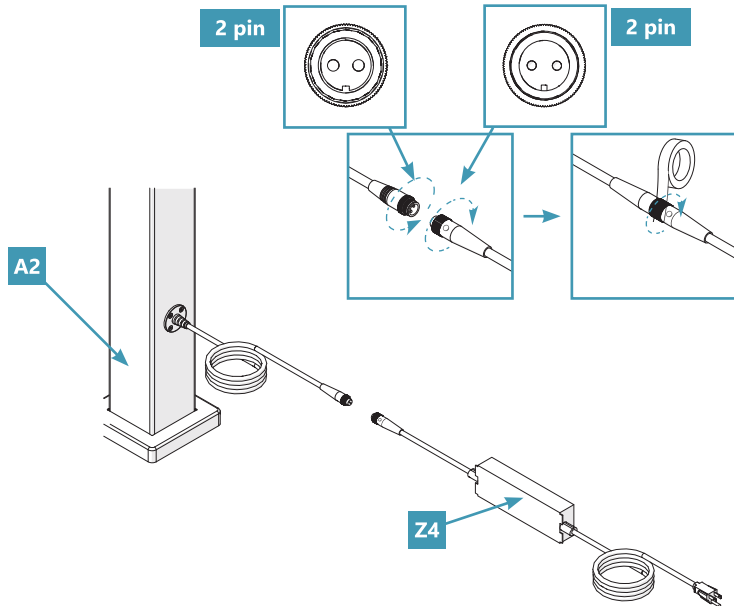

Z4 x 1

Z8 x 1



10. Secure the corner pillars to the ground

The pergola must be firmly and permanently secured to the ground. If the ground is not level or suitable, please refer to the section "Before assembling your pergola".



10A

To fix the corner pillars (**A** & **A2**) with the four foot plates **J** , drill through each hole with a hammer drill.


J x 4



Z x 1



x 4

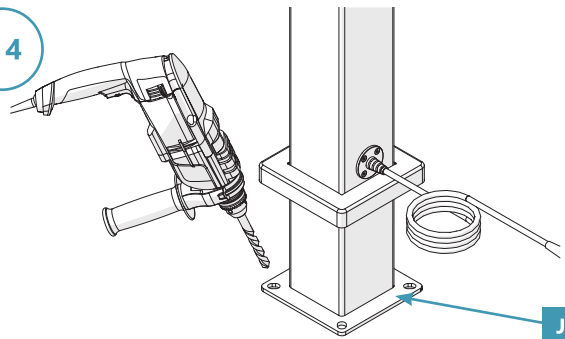


10B

Remove all the debris and dirt. Then firmly insert an anchor bolt **W** into each hole, using a hammer.

W x 16




x 4

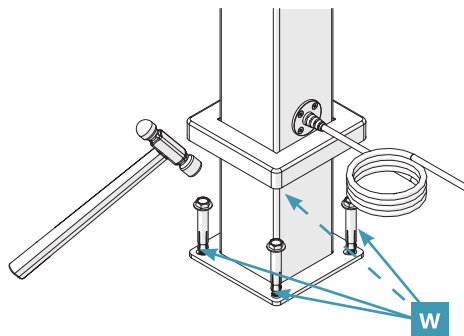


10C

Tighten the hexagonal ends of each bolt with a spanner/wrench.

x 4

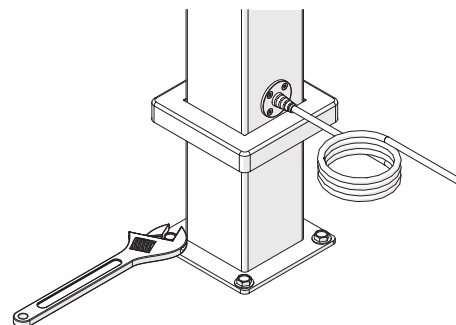


11. End of assembly

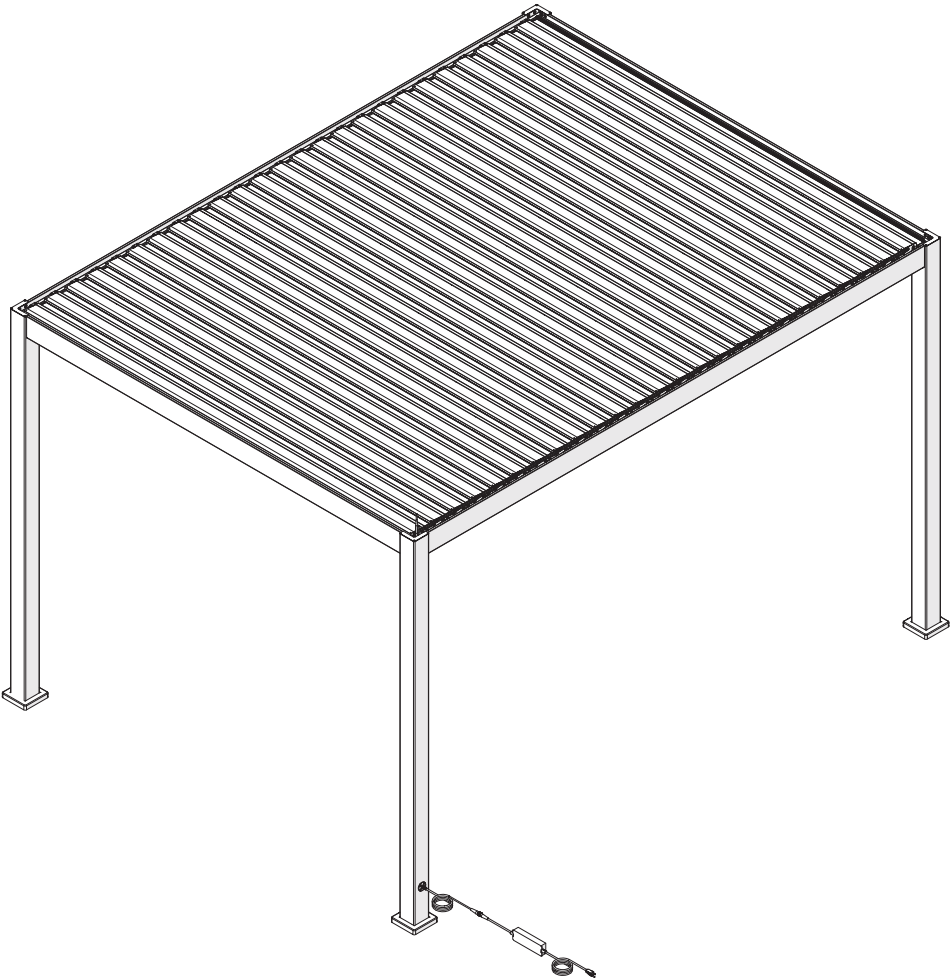

OPERATION OF YOUR PERGOLA


Plug the power supply adapter into the mains



The LED light will light up for two seconds and then turn off to indicate that the device has successfully powered on.

If no light is observed, please sequentially inspect the indicator lights on the connectors at the positions indicated in the right picture.

If any indicator light is off, please reconnect the corresponding connectors according to assembly steps **6A** and **9C**. (Connector 2 should be pulled out from the pillar for inspection.)

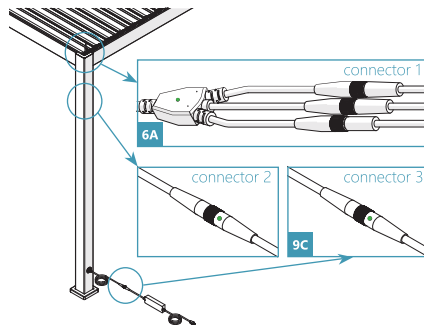


Warning:

To reduce the risk of electric shock, this equipment has a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.

Operate with the remote control


Insert the AAA batteries into the remote control **Z6** and press the appropriate buttons for lighting or louver adjustments.


If you encounter issues controlling the lights/ louvers or notice a delay while switching through the remote control, please re-pair the remote by following the **Pairing** steps outlined below.



Pairing:

1. Unplug the power supply and remove the battery from the remote control.
2. Wait for **15 seconds**, then reconnect the power supply and reinstall the battery in the remote control, make sure batteries are not worn out and that they are inserted correctly.
3. Once the light on the remote begins to flash, it indicates pairing mode has been activated. Please complete the pairing process **within 5 minutes** of reconnecting the power.
4. Simultaneously press and hold both **4** and **5** on the remote control.
5. After successful pairing, the light strip will flash twice and all louvers will move back and forth once.



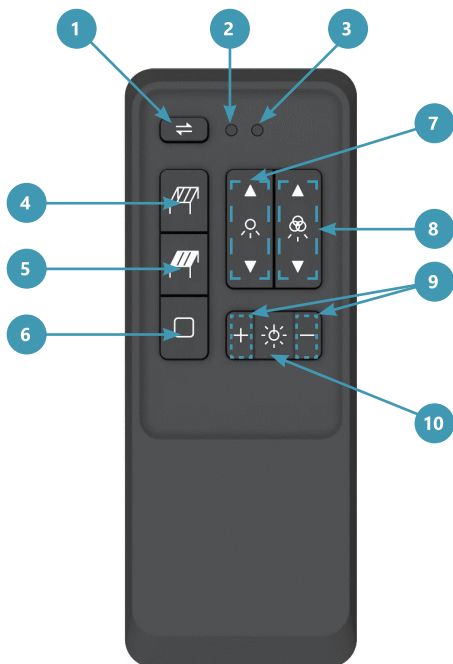

Operating

- 1** Toggle to control actuator 1, actuator 2 or both actuators
- 2** Led indicator for actuator 1
- 3** Led indicator for actuator 2
- 4** Open louvers
- 5** Close louvers
- 6** Stop louver movement
- 7** Single color mode: Toggle light colors
- 8** Dynamic lighting mode: Toggle chasing effects
- 9** Adjust brightness (Only works for single color mode)
- 10** Turn on/off lights

Warning


- Non-rechargeable batteries are not to be recharged.
- Different types of batteries are not to be mixed.
- New and used batteries are not to be mixed.
- Batteries are to be inserted with the correct polarity.
- Exhausted batteries are to be removed from the appliance and safely disposed of.
- If the appliance is to be stored unused for a long period, the batteries should be removed.
- The supply terminals are not to be short-circuited.




PROBLEM SOLVING, CARE & MAINTENANCE

Issue	Explanation or Action to take
The LED light strip is deformed after removing it from the packaging.	Expand the light strip and leave it at room temperature for a period of time until its shape is restored before installing it.
The surface of the LED light strip oxidizes and changes color after long-term use.	Regularly clean the surface to ensure cleanliness. If necessary, order a replacement light strip.
Abnormal noise occurs during the rotation of the louver(s).	Check if any of the louvers are deformed. If this is the case, replace them. If the louvers are not deformed but they are colliding with one another, replace the beam.
The remote control cannot be paired with the control system.	Check if the product is powered on. Check if the remote control battery is installed or if the battery is depleted. Remove the rear cover of the remote control and check if the positive and negative poles of the battery are correct. Remove the battery and reinstall it to avoid poor contact. (The details can be reviewed in the Page32) If the problem still persists, please contact customer service.
The LED light strip operates normally, but the liner actuator does not.	Replace the beam with motor.
The product is a dual-pergola, and the louvers on both sides do not open or close synchronously.	Slight asynchronization is normal. If it differs by more than 1 second, please refer to the contact section on page 36.
Some of the light beads on the LED light strip do not work according to the instructions.	Replace the light strip.

Issue	Explanation or action to take
The flatness of the louver is damaged due to weather conditions.	Replace the affected louvers.
The louvers cannot be reset when there is a power failure.	Remove the screws on the driver, take out the driver connected to the screws, and allow the louvers to reset automatically.
The drain is blocked by leaves or debris.	Clean the ducts and guttering of the pergola regularly.
The casting powder on the beam surface falls off after the motor runs for long periods.	No intervention is needed under normal circumstances.

General Care & Maintenance

Dust and dirt will collect on the pergola and will require periodic cleaning	Use a water/detergent mixture and a soft clean cloth to clean the pergola.	Air dry or wipe with a soft clean cloth	Do not operate the awning when maintenance, such as window cleaning, is being carried out in the vicinity.
			

For more soiled areas, rinse the surface with clean water from top to bottom.	In most situations it is not necessary to lubricate the moving parts of the pergola. However, when squeaking occurs, using a silicone spray lubricant is recommended.	Do not use any petroleum based spray lubricant.	Disconnect the awning from the supply when maintenance, such as window cleaning, is being carried out in the vicinity.
	 Silicone based	 Petroleum based	
In coastal areas, it is recommended that you frequently spray the pergola with water to reduce accumulation of salt and dirt.	Disconnect the cables if the pergola is not being used for long periods.	When the temperature is below 0°C/32°F, it is recommended to use the product less frequently to prolong the product's service life.	The drive shall be disconnected from its power source during cleaning, maintenance and when replacing parts.
		 < 0°C / 32°F	

Periodic inspection

Frequently examine the installation for imbalance and signs of wear or damage to cables and springs. Do not use if repair or adjustment is necessary.

- Check the pergola is fixed firmly to the ground.
- Check the pergola's mobile components are in good working order.
- Check that the driving parts are sufficiently lubricated.
- Check the condition of the electrical cables and inspect their mains connection.
- Check the operation of the motor's limit switch and correct where necessary.
- Check the screws and rivet joints on the pergola.
- Check the condition of mobile roof and bearings.

WARRANTY & COMPLAINTS PROCEDURE

The terms and conditions of our limited warranty can be found at www.miradoroutdoor.de. Alternatively, you can contact your local Pergola sales representative.

**Contact:
Customer service: info@miradoroutdoor.de**

DISASSEMBLY & DISPOSAL OF THE PRODUCT

Incorrect disassembly of the pergola may lead to serious injury and product damage.

Disassembly should be assigned to qualified personnel with adequate training within the scope of occupational health and safety and knowledge within the scope of recycling.

Disposal of used Electrical and Electronic Equipment

When the service life of the product is over, it is necessary to disassemble it for disposal and to sort the individual materials and components in compliance with the local regulations of your country.

Important disposal information

In compliance with European Directive 2012/19EU on waste electrical and electronic equipment (WEEE) it is forbidden to place the waste equipment marked with the crossed bin symbol with other waste to a container intended for domestic waste. Users wishing to dispose of electronic or electrical equipment are obliged to return it to a designated waste equipment collection point.

The above statutory obligations were introduced in order to limit the amount of waste generated from waste electrical and electronic equipment, and to ensure an appropriate level of collection, recovery and recycling. The equipment does not contain hazardous components which have a particularly adverse effect on the environment or human health.



Utilization of used batteries

In compliance with the provisions of the Directive 2006/66/EC of the European Parliament and of the Council of 6 September 2006 on batteries and accumulators and waste batteries and accumulators and repealing Directive 91/157/EEC, the End User is obliged to transfer used portable batteries, which are no longer used as a source of energy, to an official collection point. It is forbidden to place used batteries with other waste in the same container. To prevent environmental pollution and causing a possible hazard for human and animal health, used batteries should be disposed of in the correct container at the designated collection points.

CERTIFICATION INFORMATION

- Declaration of performance (DOP) —→ 39
- EU Declaration of Conformity —→ 40
- EC Declaration of Conformity —→ 41
- UK Declaration of Conformity —→ 42

Declaration of performance (DOP)

Reference no. DOP0001

Product name and type

Mirador Pergola and Mirador Wall Pergola/ pergola awning

Model name/ Unique identification code of the product:

111 Deluxe AxBm, 111 Deluxe e AxBm, 111 Deluxe e-Motion RC AxBm, 111 Deluxe e-Motion AxBm,
111 DA AxBm, 111 LED DA AxBm, 111 e-Motion DA AxBm, 111 e-Motion+ AxBm,
111 Deluxe Edge AxBm, 111 Deluxe Edge e AxBm, 111 Deluxe Edge e-Motion RC AxBm, 111 Deluxe Edge e-Motion AxBm,
111 Deluxe R AxBm, 111 Deluxe R e AxBm, 111 Deluxe R e-Motion RC AxBm, 111 Deluxe R e-Motion AxBm,
AxB:
3x3, 3x3.6, 3x4, 3.6x3.6, 3.6x4,
3x5.3, 3x6, 3x7.2, 3.6x5.3, 3.6x6, 3.6x7.2

111 Classic AxBm, 111 Classic e AxBm, 111 Classic e-Motion AxBm, 111 S AxBm, 111 LED S AxBm, 111 e-Motion S AxBm,
111 Premium AxBm, 111 Premium e AxBm, 111 Premium e-Motion AxBm, 111 A AxBm, 111 LED A AxBm, 111 e-Motion A AxBm,
AxB:
3x3, 3x3.6, 3x4,
3x5.3, 3x6, 3x7.2

111 Infinite AxBm, 111 Infinite e AxBm, 111 Infinite e-Motion RC AxBm, 111 Infinite e-Motion AxBm,
111 Infinite LED AxBm, 111 Infinite e-Motion DA AxBm, 111 Infinite e-Motion+ AxBm,
111 Infinite Edge AxBm, 111 Infinite Edge e AxBm, 111 Infinite Edge e-Motion RC AxBm, 111 Infinite e-Motion AxBm,
AxB:
3.6x3.6, 7.2x7.2

Purpose of Usage:

External use in buildings and other construction works

Manufacturer:

Zhejiang Zhengte Co., Ltd.
811 Dongfang Ave, Zhejiang, PRC

Documentation officer:

Ziad Zhao
Zhejiang Zhengte Co., Ltd.
No.811 Oriental Ave., Linhai, 317004, Zhejiang, China

System for assessing and verifying the constancy of performance according to Annex V of the Construction Products Regulation (EU)305/2011


System 4

Declared performance (Excluding the structural part):

Wind resistance = Class 6
Standard: EN 13561:2004+A1:2008

Zhejiang

20.07.23

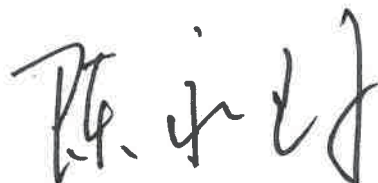

(Chairman/President)

EU Declaration of Conformity

Product name

Mirador Pergola

Model name/ Unique identification code of the product:

111 Classic e-Motion AxBm, 111 Premium e-Motion AxBm,

AxB:

3x3, 3x3.6, 3x4,

3x5.3, 3x6, 3x7.2

111 Deluxe e-Motion RC AxBm, 111 Deluxe Edge e-Motion RC AxBm, 111 Deluxe R e-Motion RC AxBm,

AxB:

3x3, 3x3.6, 3x4, 3x5.3, 3x6, 3x7.2,

3.6x3.6, 3.6x4, 3.6x5.3, 3.6x6, 3.6x7.2

111 Infinite e-Motion RC AxBm, 111 Infinite Edge e-Motion RC AxBm,

AxB:

3.6x3.6, 7.2x7.2

Software: ZTC1_EU_M2_Boot_Main

Accessories: Remote control, 3V DC Battery

Purpose of Usage:

External use in buildings and other construction works

Manufacturer:

Zhejiang Zhengte Co., Ltd.

No. 588 Linhai Ave., 317000 Linhai, Zhejiang, PRC

Documentation officer:

Ziad Zhao

Zhejiang Zhengte Co., Ltd.

No.811 Oriental Ave., Linhai, 317004, Zhejiang, China

2014/53/EU (The Radio Equipment Directive)

For the evaluation of the compliance with these Directives and Regulations, the following standards/requirements were applied:

EN 60335-1:2012/A15:2021+EN 60335-2-97:2006/A12:2015

EN 62233:2008

EN IEC 55014-1:2021+EN IEC 55014-2:2021+EN IEC 55015:2019/A11:2020

EN 61547:2009

EN IEC 61000-3-2:2019/A1:2021+EN 61000-3-3:2013/A2:2021

EN 301 489-1 V2.2.3+EN 301 489-3 V2.3.2+EN 301 489-3 V2.2.1+EN 301 489-3 V1.2.1

EN 300 440 V2.1.1+EN 300 440 V2.2.1

EN 303 413 V1.2.1

EN 301 511 V12.5.1+EN 301 908-1 V15.2.1+EN 301 908-13 V13.2.1

EN 50663:2017

EN 50665:2017

EN 62311:2008


Notified Body: TÜV SÜD Danmark ApS

NB No.: 2443

Certificate No.: DK-RED002821 i01 DK-RED002821 i03

Zhejiang

28.09.23

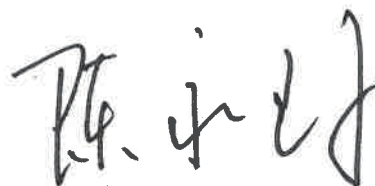

(Chairman/President)

EC Declaration of Conformity

**Product name and type**

Mirador Pergola and Mirador Wall Pergola/ pergola awning

Model name/ Unique identification code of the product:

111 Deluxe AxBm, 111 Deluxe e AxBm, 111 Deluxe e-Motion RC AxBm, 111 Deluxe e-Motion AxBm
111 Deluxe Edge AxBm, 111 Deluxe Edge e AxBm, 111 Deluxe Edge e-Motion RC AxBm, 111 Deluxe Edge e-Motion AxBm
111 Deluxe R AxBm, 111 Deluxe R e AxBm, 111 Deluxe R e-Motion RC AxBm, 111 Deluxe R e-Motion AxBm
AxB:
3x3, 3x3.6, 3x4, 3.6x3.6, 3.6x4,
3x5.3, 3x6, 3x7.2, 3.6x5.3, 3.6x6, 3.6x7.2

111 Classic AxBm, 111 Classic e AxBm, 111 Classic e-Motion AxBm
111 Premium AxBm, 111 Premium e AxBm, 111 Premium e-Motion AxBm,
AxB:
3x3, 3x3.6, 3x4,
3x5.3, 3x6, 3x7.2

111 Infinite AxBm, 111 Infinite e AxBm, 111 Infinite e-Motion RC AxBm, 111 Infinite e-Motion AxBm
AxB:
3.6x3.6, 7.2x7.2

Purpose of Usage:

External use in buildings and other construction works

Manufacturer:

Zhejiang Zhengte Co., Ltd.
811 Dongfang Ave, Zhejiang (China)

Documentation officer:

Ziad Zhao
Zhejiang Zhengte Co., Ltd.
No.811 Oriental Ave., Linhai, 317004, Zhejiang, China

Meets the provisions of Machinery Directive 2006/42/EC**Harmonised standards used:**

EN 13561:2015
EN 60335-1:2012+A11:2014+A13:2017+A1:2019 + A14:2019 +A2:2019+A15:2021
EN 60335-2-97:2006+A11:2008+ A2:2010+ A12:2015
EN 62233:2008

Zhejiang
20.07.23

(Chairman/President)

UK Declaration of Conformity



Product name and type

Mirador Pergola

Model name/ Unique identification code of the product:

111 Deluxe AxBm, 111 Deluxe e AxBm, 111 Deluxe e-Motion RC AxBm, 111 Deluxe e-Motion AxBm
111 Deluxe Edge AxBm, 111 Deluxe Edge e AxBm, 111 Deluxe Edge e-Motion RC AxBm, 111 Deluxe Edge e-Motion AxBm
111 Deluxe R AxBm, 111 Deluxe R e AxBm, 111 Deluxe R e-Motion RC AxBm, 111 Deluxe R e-Motion AxBm

AxB:

3x3, 3x3.6, 3x4, 3.6x3.6, 3.6x4,
3x5.3, 3x6, 3x7.2, 3.6x5.3, 3.6x6, 3.6x7.2

111 Classic AxBm, 111 Classic e AxBm, 111 Classic e-Motion AxBm
111 Premium AxBm, 111 Premium e AxBm, 111 Premium e-Motion AxBm,

AxB:

3x3, 3x3.6, 3x4,
3x5.3, 3x6, 3x7.2

111 Infinite AxBm, 111 Infinite e AxBm, 111 Infinite e-Motion RC AxBm, 111 Infinite e-Motion AxBm

AxB:

3.6x3.6, 7.2x7.2

Purpose of Usage:

External use in buildings and other construction works

Manufacturer:

Zhejiang Zhengte Co., Ltd.
811 Dongfang Ave, Zhejiang (China)

Documentation officer:

Ziad Zhao
Zhejiang Zhengte Co., Ltd.
No.811 Oriental Ave., Linhai, 317004, Zhejiang, China


Meets the provisions of Supply of Machinery (Safety) Regulations 2008 (No. 1597)

Harmonised standards used:

EN 13561:2015
EN 60335-1:2012
EN 60335-1:2012/AC:2014
EN 60335-1:2012/A11:2014
EN 60335-1:2012/A13:2017
EN 60335-1:2012/A15:2021
EN 60335-2-97:2006
EN 60335-2-97:2006/A12:2015

Zhejiang

20.07.23

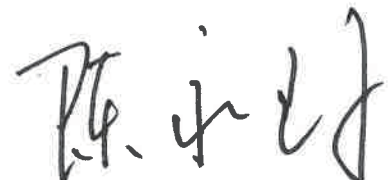

(Chairman/President)

IMPORTER:

ZT Outdoor Living GmbH
Schnorrstraße 70
DE-01069 Dresden
GERMANY



Printed on 100%
post-consumer
recycled paper

