


# CEILING ROUND IP44










|                                    | EAN           | Ø x h [mm] | W  | VAC     | Hz    | lm   | lm/W | K    |
|------------------------------------|---------------|------------|----|---------|-------|------|------|------|
| CEILING ROUND 210 12W 830 IP44     | 4099854105777 | 210x62     | 12 | 220-240 | 50/60 | 900  | 75   | 3000 |
| CEILING ROUND 210 12W 840 IP44     | 4099854105791 | 210x62     | 12 | 220-240 | 50/60 | 900  | 75   | 4000 |
| CEILING ROUND 210 12W 865 IP44     | 4099854105814 | 210x62     | 12 | 220-240 | 50/60 | 900  | 75   | 6500 |
| CEILING ROUND 255 18W 830 IP44     | 4099854105838 | 255x70     | 18 | 220-240 | 50/60 | 1350 | 75   | 3000 |
| CEILING ROUND 255 18W 840 IP44     | 4099854105852 | 255x70     | 18 | 220-240 | 50/60 | 1350 | 75   | 4000 |
| CEILING ROUND 255 18W 865 IP44     | 4099854105876 | 255x70     | 18 | 220-240 | 50/60 | 1350 | 75   | 6500 |
| CEILING ROUND 325 24W 830 IP44     | 4099854105890 | 325x72     | 24 | 220-240 | 50/60 | 1800 | 75   | 3000 |
| CEILING ROUND 325 24W 840 IP44     | 4099854105913 | 325x72     | 24 | 220-240 | 50/60 | 1800 | 75   | 4000 |
| CEILING ROUND 325 24W 865 IP44     | 4099854105937 | 325x72     | 24 | 220-240 | 50/60 | 1800 | 75   | 6500 |
| CEILING ROUND 210 SEN 12W 830 IP44 | 4099854105951 | 210x62     | 12 | 220-240 | 50/60 | 900  | 75   | 3000 |
| CEILING ROUND 210 SEN 12W 840 IP44 | 4099854105975 | 210x62     | 12 | 220-240 | 50/60 | 900  | 75   | 4000 |
| CEILING ROUND 210 SEN 12W 865 IP44 | 4099854105999 | 210x62     | 12 | 220-240 | 50/60 | 900  | 75   | 6500 |
| CEILING ROUND 255 SEN 18W 830 IP44 | 4099854106019 | 255x70     | 18 | 220-240 | 50/60 | 1350 | 75   | 3000 |
| CEILING ROUND 255 SEN 18W 840 IP44 | 4099854106033 | 255x70     | 18 | 220-240 | 50/60 | 1350 | 75   | 4000 |
| CEILING ROUND 255 SEN 18W 865 IP44 | 4099854106057 | 255x70     | 18 | 220-240 | 50/60 | 1350 | 75   | 6500 |
| CEILING ROUND 325 SEN 24W 830 IP44 | 4099854106071 | 325x72     | 24 | 220-240 | 50/60 | 1800 | 75   | 3000 |
| CEILING ROUND 325 SEN 24W 840 IP44 | 4099854106095 | 325x72     | 24 | 220-240 | 50/60 | 1800 | 75   | 4000 |
| CEILING ROUND 325 SEN 24W 865 IP44 | 4099854106118 | 325x72     | 24 | 220-240 | 50/60 | 1800 | 75   | 6500 |

**CEILING ROUND IP44**

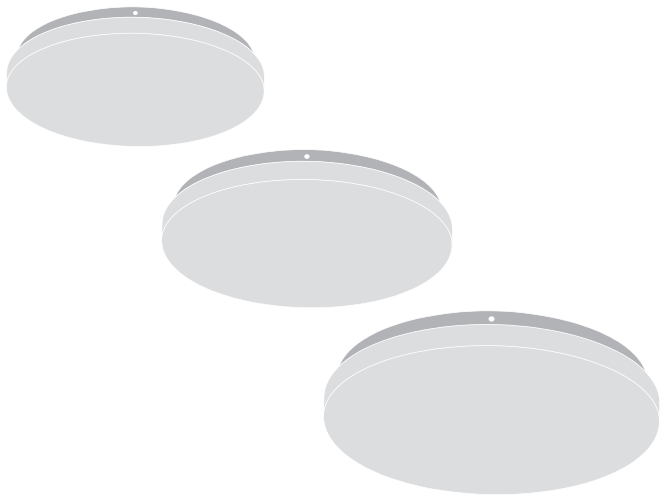


|                                    | EAN           | IP | IK |  | R <sub>a</sub> | °C        | PF   |  |
|------------------------------------|---------------|----|----|-----------------------------------------------------------------------------------|----------------|-----------|------|-------------------------------------------------------------------------------------|
| CEILING ROUND 210 12W 830 IP44     | 4099854105777 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,24 kg                                                                             |
| CEILING ROUND 210 12W 840 IP44     | 4099854105791 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,24 kg                                                                             |
| CEILING ROUND 210 12W 865 IP44     | 4099854105814 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,24 kg                                                                             |
| CEILING ROUND 255 18W 830 IP44     | 4099854105838 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,32 kg                                                                             |
| CEILING ROUND 255 18W 840 IP44     | 4099854105852 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,32 kg                                                                             |
| CEILING ROUND 255 18W 865 IP44     | 4099854105876 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,32 kg                                                                             |
| CEILING ROUND 325 24W 830 IP44     | 4099854105890 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,48 kg                                                                             |
| CEILING ROUND 325 24W 840 IP44     | 4099854105913 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,48 kg                                                                             |
| CEILING ROUND 325 24W 865 IP44     | 4099854105937 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,48 kg                                                                             |
| CEILING ROUND 210 SEN 12W 830 IP44 | 4099854105951 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,25 kg                                                                             |
| CEILING ROUND 210 SEN 12W 840 IP44 | 4099854105975 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,25 kg                                                                             |
| CEILING ROUND 210 SEN 12W 865 IP44 | 4099854105999 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,25 kg                                                                             |
| CEILING ROUND 255 SEN 18W 830 IP44 | 4099854106019 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,33 kg                                                                             |
| CEILING ROUND 255 SEN 18W 840 IP44 | 4099854106033 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,33 kg                                                                             |
| CEILING ROUND 255 SEN 18W 865 IP44 | 4099854106057 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,33 kg                                                                             |
| CEILING ROUND 325 SEN 24W 830 IP44 | 4099854106071 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,49 kg                                                                             |
| CEILING ROUND 325 SEN 24W 840 IP44 | 4099854106095 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,49 kg                                                                             |
| CEILING ROUND 325 SEN 24W 865 IP44 | 4099854106118 | 44 | 03 | 120°                                                                              | >80            | -20...+40 | >0.7 | 0,49 kg                                                                             |

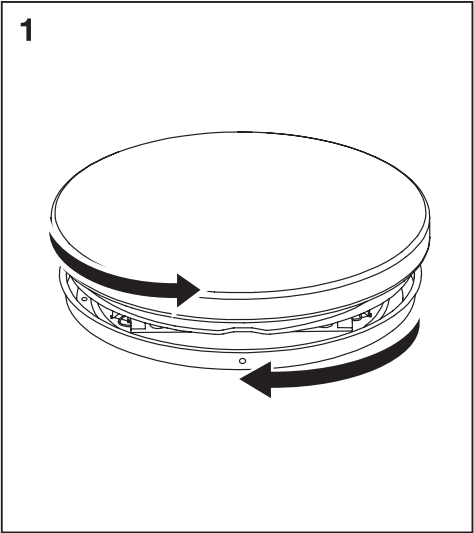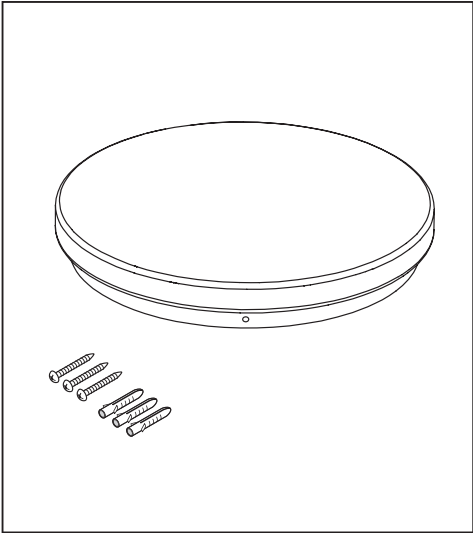

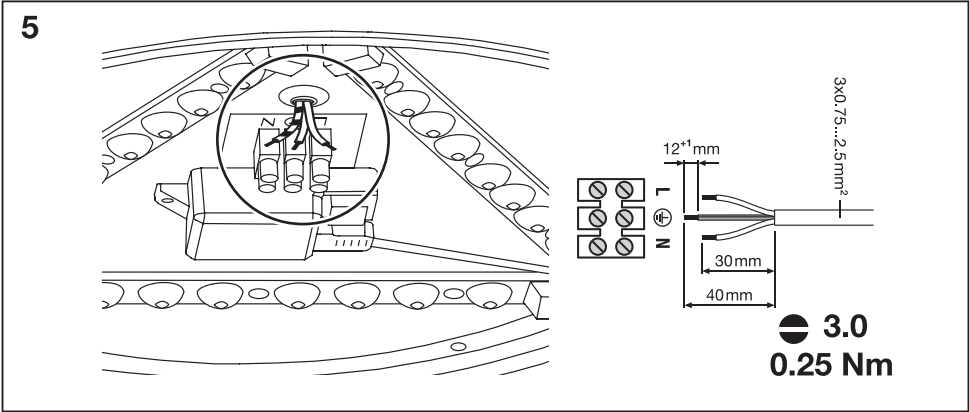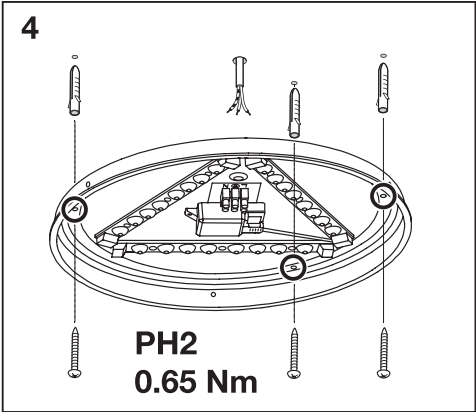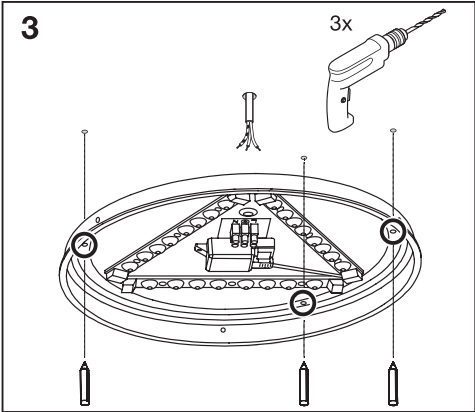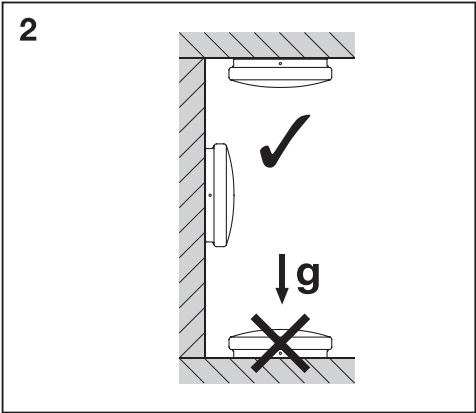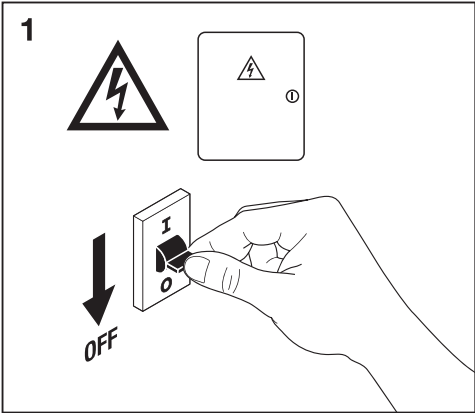

6

OFF



ON



Sound threshold

| 1          | 2           |
|------------|-------------|
| A1 ON      | A2 30-50 dB |
| B1 Disable | B2 60-80 dB |




(A1 = ON)

Daylight threshold

| 3          | 4            |
|------------|--------------|
| A3 ON      | A4 15-35 lux |
| B3 Disable | B4 50-70 lux |

7




8



ON



9



|                                  | Inrush current [A] | Th50 [μs] | B10 | B16 | B32 | C10 | C16 | C32 |
|----------------------------------|--------------------|-----------|-----|-----|-----|-----|-----|-----|
| Ceiling Round IP44 210mm 12W     | 7.4                | 184       | 45  | 51  | 80  | 47  | 75  | 118 |
| Ceiling Round IP44 210mm 18W     | 7.4                | 240       | 35  | 45  | 70  | 40  | 64  | 101 |
| Ceiling Round IP44 210mm 24W     | 7.8                | 344       | 20  | 26  | 41  | 25  | 41  | 64  |
| Ceiling Round SEN IP44 210mm 12W | 6.8                | 128       | 70  | 89  | 139 | 70  | 112 | 176 |
| Ceiling Round SEN IP44 210mm 18W | 7.8                | 320       | 23  | 29  | 45  | 28  | 46  | 72  |
| Ceiling Round SEN IP44 210mm 24W | 7.8                | 336       | 20  | 26  | 41  | 28  | 41  | 64  |



Raccolta Carta  
Verifica le disposizioni  
del tuo comune.



FR


Cet appareil,  
ses accessoires  
et son cordon,  
se recyclent



Points de collecte sur [www.quefairedemesdechets.fr](http://www.quefairedemesdechets.fr)



C10449057  
G11224984  
18.02.25



LEDVANCE SASU  
CQM, 5 rue d'Altorf  
67120 Molsheim France  
[www.ledvance.com](http://www.ledvance.com)

® LEDVANCE Ltd, Sterling House, 810  
Mandarin Court, Warrington, Cheshire,  
WA1 1GG, United Kingdom