


PHILIPS

Ledinaire Surface-mounted

SM060C

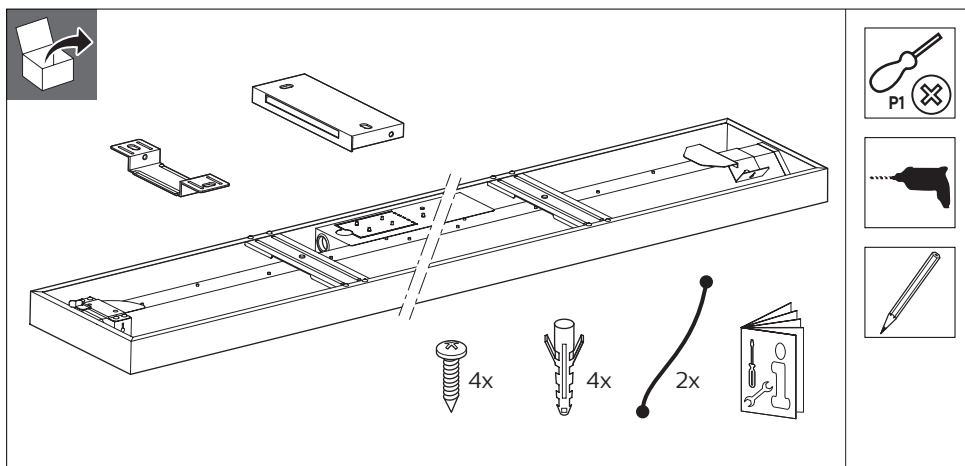

50Hz
60Hz

220V
240V

LIFE
L65
50K hrs

IP20


IK03

Max.
40 °C
Min.
10 °C


GLOW
WIRE
650 °C



	System lumen	CCT	Driver	Light source of energy efficiency class	P(W)	kg
SM060C LED34S/840 PSU W20L120 NOC	3400lm				34	2.62
SM060C LED40S/840 PSU W20L120 NOC	4000lm	4000K	PSU	E	40	2.62
SM060C LED34S/840 PSU W20L120 OC	3400lm				34	2.78

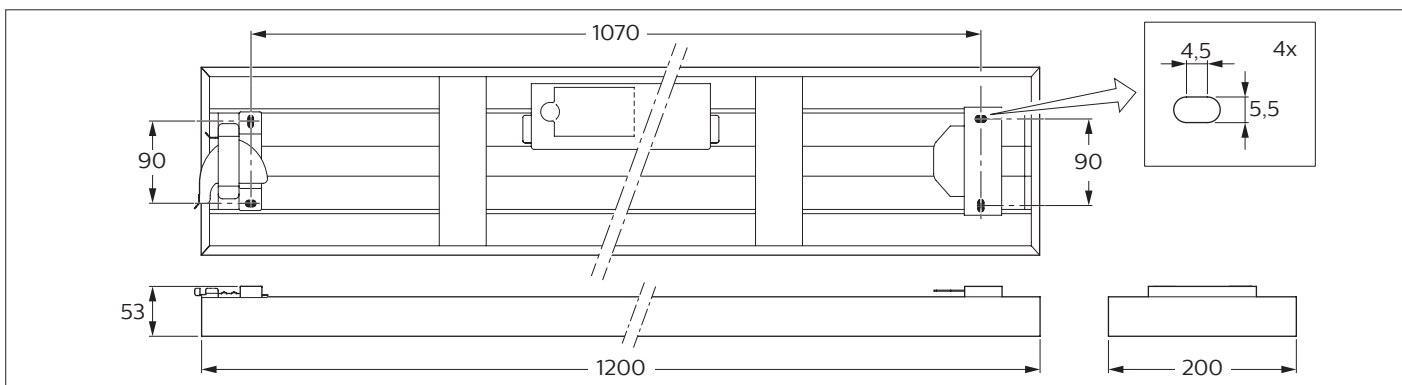

Inrush current

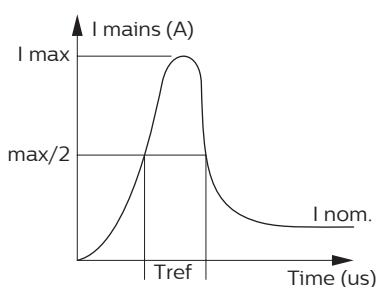

	LED34S	LED40S
Electrical characteristics		
I max.(A)	10.8	9,68
Tref(μs)	36	75
MCB	Luminaires Max.	
B-10A	15	15
B-16A	24	24
C-10A	25	25
C-16A	41	41



- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The light source and driver contained in this luminaire shall be replaced by a professional.



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

