



PHILIPS

Ledinaire Waterproof

WT065C

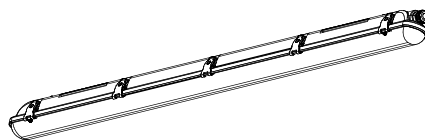

220V
240V

50Hz
60Hz

IP65

IK08


Max.
40°C
Min.
-20°C




LIFE
75K hrs
@L70

GLOW
WIRE
850 °C

Product Description	CCT(K)	System light output(Lm)	P(W)	Energy Efficiency Class of Light source	Dimensions (mm)		kg
L	A						
WT065C LED29_48S/840 PSU L1200	4000	2900/4800	23/42	D	1207	660-880	1.15
WT065C LED41_68S/840 PSU L1500		4100/6800	30/53	D	1507	940-1160	1.35
WT065C LED29_48S/840 PSU L1200 TW1		2900/4800	23/42	D	1214	660-880	1.3
WT065C LED41_68S/840 PSU L1500 TW1		4100/6800	30/53	D	1514	940-1160	1.5

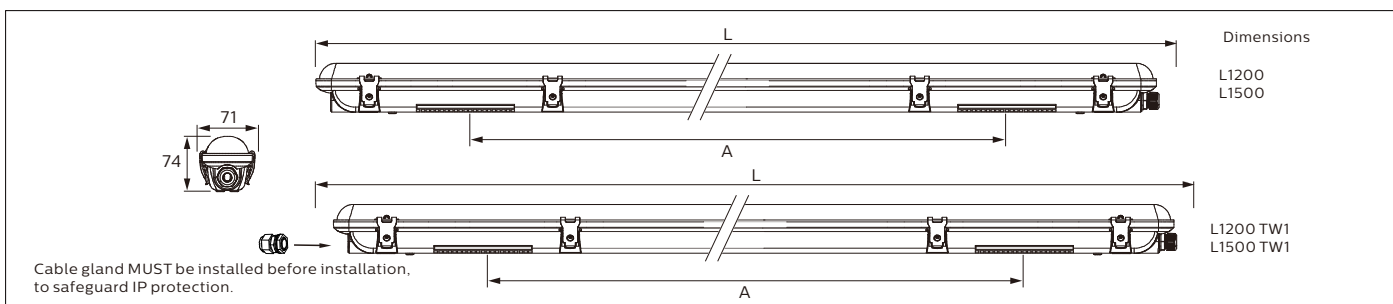

	LED29_48S	LED41_68S
I _{max}	14.2	15
T _{ref} [μs]	222	240
Max. Nr of products		
Drivers/ MCB16A type B [max.]	36	31
Drivers/ MCB10A type B [max.]	22	19
Drivers/ MCB16A type C [max.]	60	52
Drivers/ MCB10A type C [max.]	37	32



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Do not store/install/use the luminaire in corrosive environment with hazardous substances, e.g., sulphur, chlorine, phthalates etc., or on the location where it is exposed to conductive dust, heavily grease (esp. mineral oil or distillates, e.g., petroleum), heavily naphthenic treated with hydrogen.
- This product is not suitable for cold & humid storage areas, especially where obvious temperature gradients are present, such as ventilation opening, door, etc.
- Do not install the luminaire on the location where it is exposed to direct sunlight. UV radiation will damage the material over time, resulting in loss of waterproof sealing and IP65 rating.
- Do not stare into LED light beam.

1

Mounting distance A

0.6mm

2X

Please use either of these two holes for installation

2

Type	L1200	L1500
A	660-880	940-1160

3

MultiLumen switch(2-in-1)- option

Please switch off the mains before changing the lumens.

Product Type	XX Lumen	YY Lumen (factory setting)
LED29_48S	2900 Lumen	4800 Lumen
LED41_68S	4100 Lumen	6800 Lumen

4

