


PHILIPS

Ledinaire Panel

RC065B/RC066B

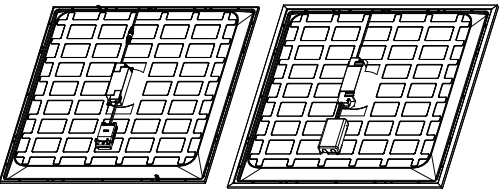

Safety cable include in RC065B



220V
240V

50Hz
60Hz



Life
50K hrs
@L80

Life
75K hrs
@L70

Max.
35°C
Min.
-10°C


GLOW
WIRE
650 °C






	Lumen (lm)	CCT (K)	P (W)	IK	Energy efficiency class of light source	L×W×H (mm)		Safety cable (SC) in the box
RC065B G5 34S/840 PSU W60L60 OC SC	3400	4000	28.0	02	D	595x595x35	1.65	Yes
RC065B G5 34S/840 PSU W60L60 NOC SC	3400	4000	28.0	02	D	595x595x34	1.35	Yes
RC065B G5 34S/840 PSD W60L60 OC SC	3400	4000	28.0	02	D	595x595x35	1.65	Yes
RC066B 34S/840 PSU W62L62 OC	3400	4000	28.0	02	D	620x620x35	1.75	No
RC066B 34S/840 PSD W62L62 OC	3400	4000	28.0	02	D	620x620x35	1.75	No
RC065B G5 34S/840 PSU W60L60 OC 6PK SC	3400	4000	28.0	02	D	595x595x35	1.65	Yes
RC066B 34_36S/830_40 PSU W62L62 OC	3400/ 3600	3000/3500/ 4000	30.0	02	D	620x620x35	1.75	No
RC065B G5 34_36S/830_40 PSU W60L60 OC SC	3400/ 3600	3000/3500/ 4000	30.0	02	D	595x595x35	1.65	Yes
RC065B G5 34_36S/830_40 PSU 60x60 NOC SC	3400/ 3600	3000/3500/ 4000	30.0	02	D	595x595x34	1.35	Yes
RC065B G5 34_36S/830_40 PSD W60L60 OC SC	3400/ 3600	3000/3500/ 4000	28.0	02	D	595x595x35	1.65	Yes
RC065B G5 34_36S/830_40 PSU 30x120 OC SC	3400/ 3600	3000/3500/ 4000	30.0	02	D	295x1195x35	1.75	Yes
RC065B G5 34_36S/830_40 PSD 60x60 NOC SC	3400/ 3600	3000/3500/ 4000	28.0	02	D	595x595x35	1.35	Yes

* Default setting : 3000/3500K/**4000K** * **Product power included driver**

PSU

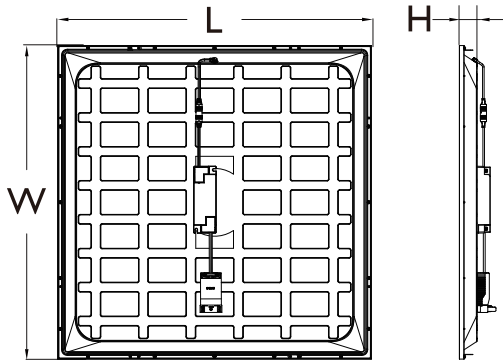

PSD

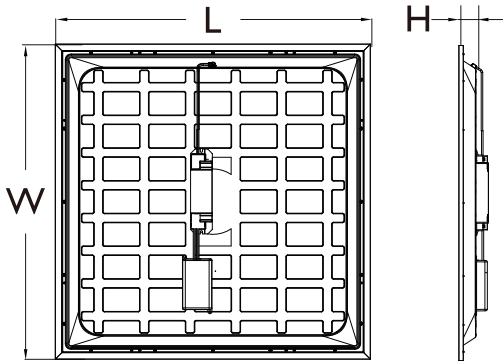


*DC Connector


* **RC065B with DC connector, RC066B without DC connector**

Available as accessory(Need to purchase separately)


Suspension set:
911401809487: RC159Z Suspension set SME-3 WH
911401809387: RC159Z Suspension set SME-4 WH

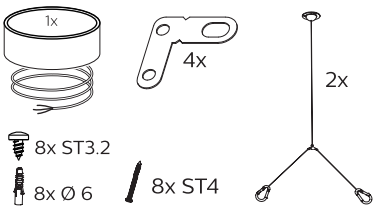


Plaster set:
911401809287: RC159Z Plaster Ceiling SMB-PLC




Safety cable:
911401809187: RC159Z Safety Cable



Surface mounted set:
911401808087:RC059Z SMB W60L60
911401808187:RC059Z SMB W62L62
911401808287:RC059Z SMB W30L120

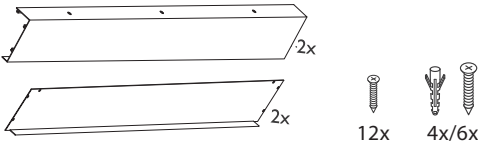

Surface mounted set:
911401807787:RC159Z SMB W60L60
911401807887:RC159Z SMB W62L62
911401807987:RC159Z SMB W30L120

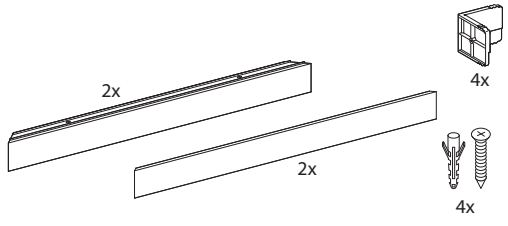




The luminaire shall not be covered with thermal insulation or similar material under any circumstance.




If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc,are present.

Inrush current

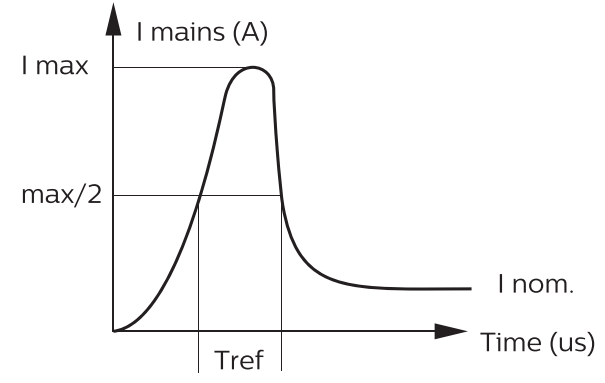


	28W PSU	28W PSD	30W
Electrical characteristics			
I _{max} (A)	18.7	25.8	22
T _{ref} (μs)	218	255	250
MCB	Luminaires Max.		
B-10 A	13	9	6
B-13 A	18	13	8
B-16 A	23	17	10
C-10 A	24	17	10
C-13 A	32	23	13
C-16 A	39	28	17


PSU

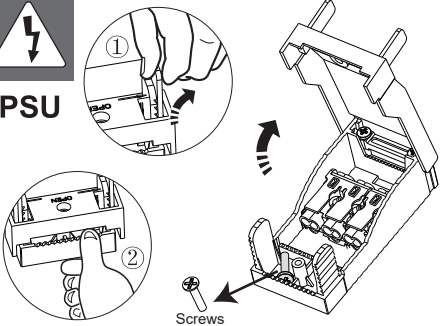


2




3




4




PSD

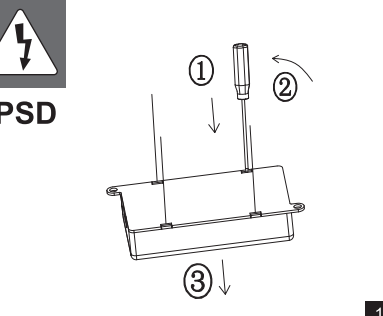


2

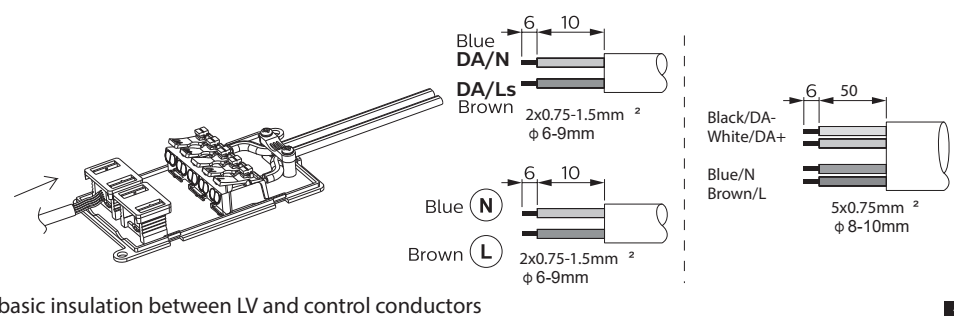


3

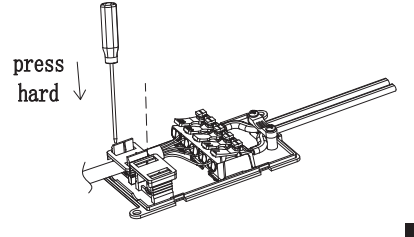


4

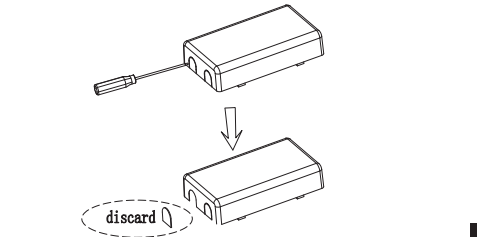


5

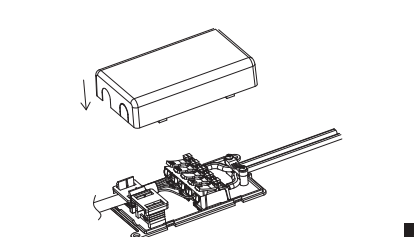

6

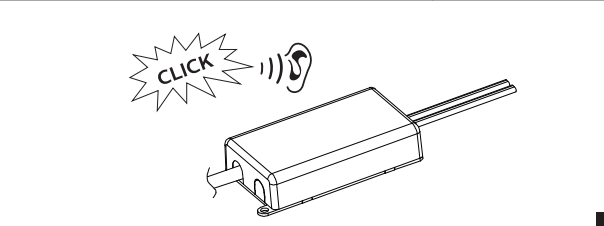


7

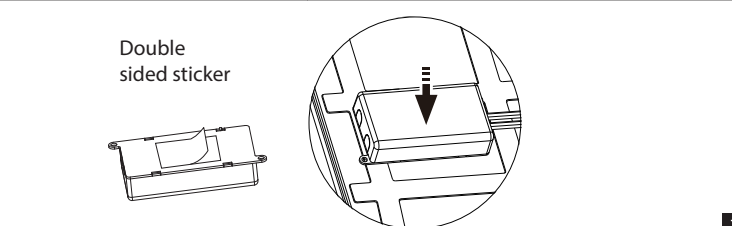


All-in: Multi Color switch set your color temperature
3000K, 3500K or 4000K (=default)

Colour Temperature selectable			
Drive	3000K	3500K/4000K	Wattage
PSU	3400lm	3600lm	30W
PSD	3400lm	3600lm	28W

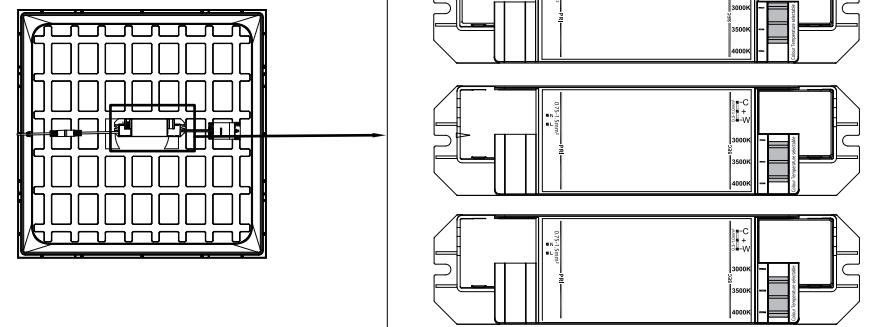

A Visible Profile Ceiling mounting(VPC) - Lay-In mounting

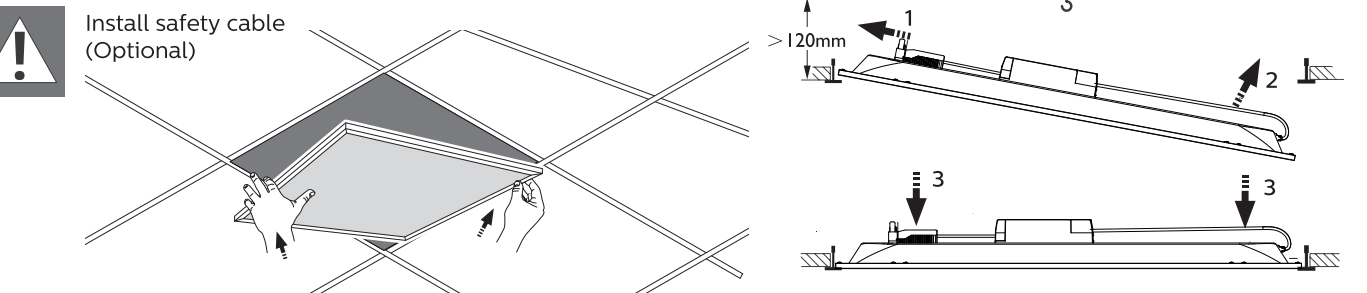

B Suspension mounting(SME-3 WH/SME-4WH)

W60L60/W62L62:L=305mm
W30L120:L=532mm

