







PHILIPS

Ledinaire
ClearAccent All-in


RS071B

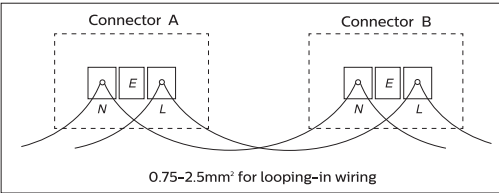

Model	Product Description	Power(W)	CRI(Ra)	CCT(K)	Total Lumen(lm)	Energy efficiency class of light source	Beam Angle	Dimension AxB,C(mm)	Cut-Out D(mm)	Weight (kg)
9290033225	RS071B 5S/827_30_40 40D PSR P16 IP65 WH	6	80	2700K-3000K-4000K	550	F	40°	Ø89, 43	Ø68	0.215
9290033226	RS071B 5S/827_30_40 40D PSR P16 IP65 BK	6	80	2700K-3000K-4000K	550	F	40°	Ø89, 43	Ø68	0.215
9290033227	RS071B 5S/827_30_40 60D PSR P16 IP65 WH	6	80	2700K-3000K-4000K	550	F	60°	Ø89, 43	Ø68	0.215
9290033228	RS071B 5S/827_30_40 60D PSR P16 IP65 BK	6	80	2700K-3000K-4000K	550	F	60°	Ø89, 43	Ø68	0.215
9290033229	RS071B Trim Accessory GD							Ø89, 3.3		0.018
9290033230	RS071B Trim Accessory SI							Ø89, 3.3		0.018

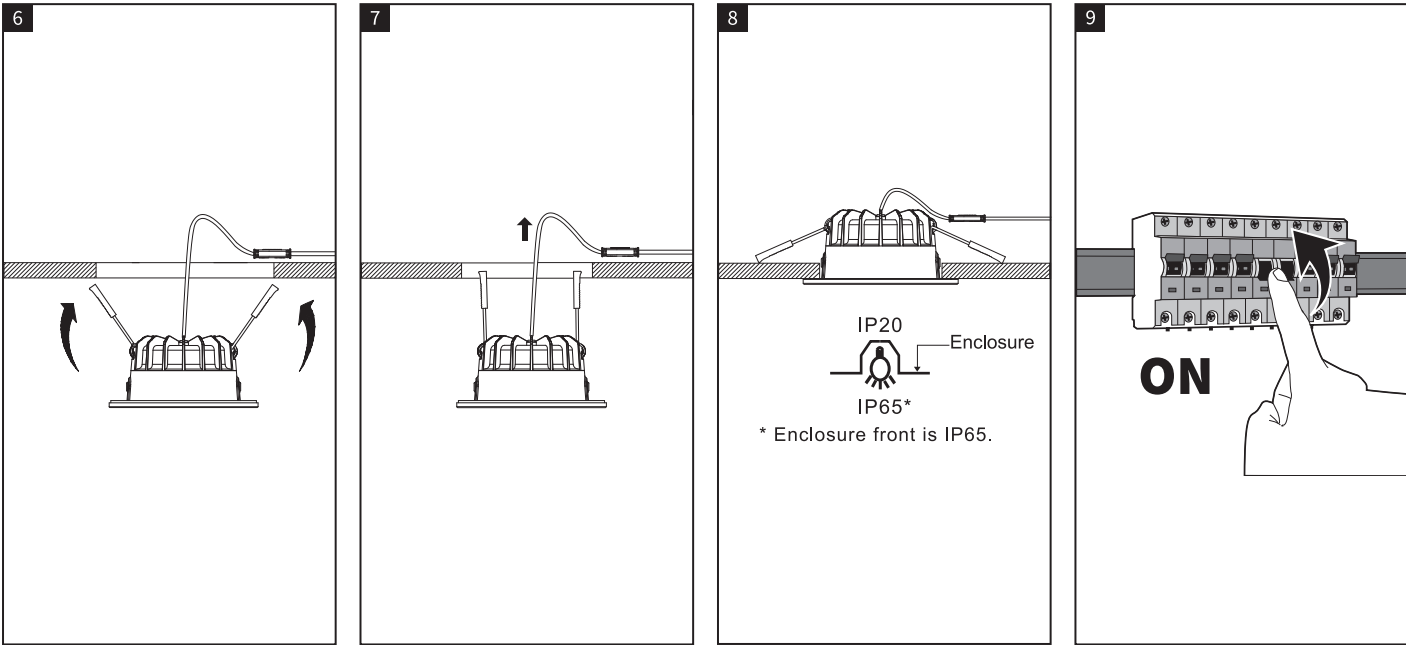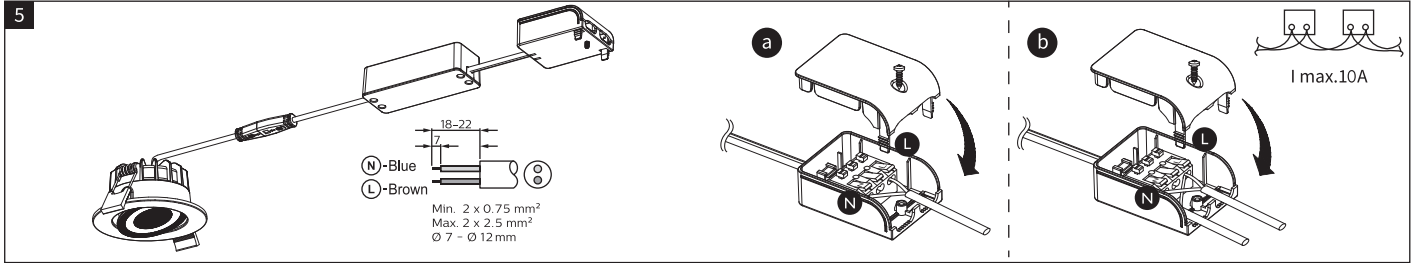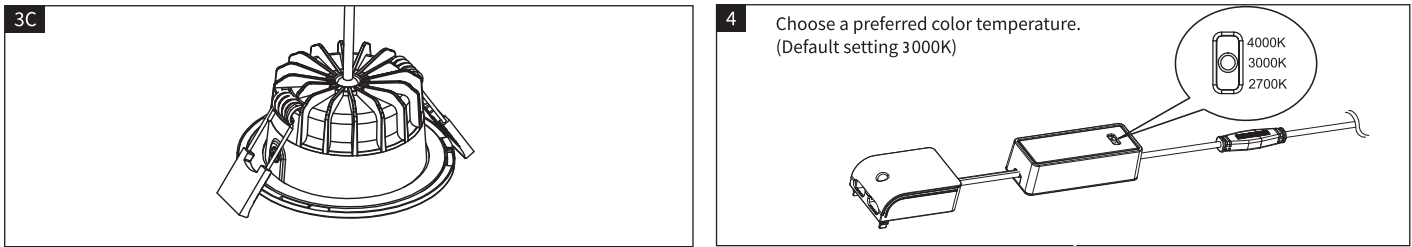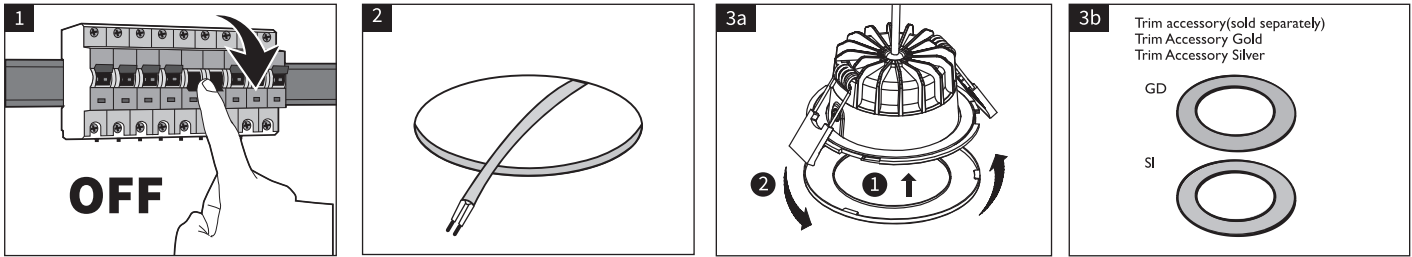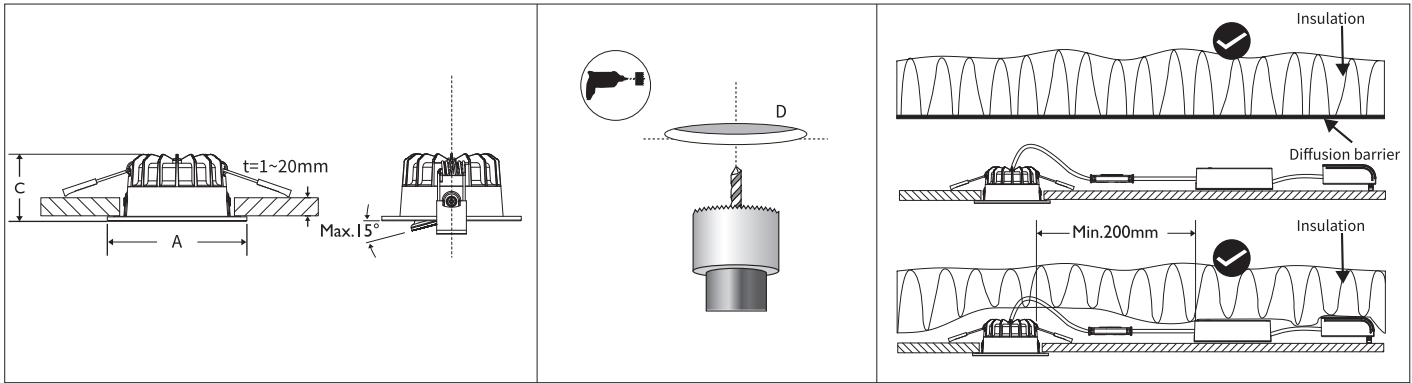

Inrush Current

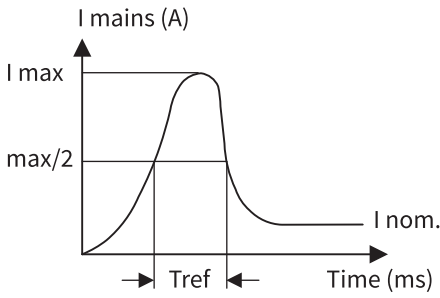

	9290033225 , 9290033226 , 9290033227 , 9290033228
Electrical characteristic	
I _{max} (A)	1.4
T _{ref} (ms)	0.2
MCB	Luminaire Max.(pcs)
Type B-10A	150
Type B-16A	240
Type C-10A	191
Type C-16A	306



- 01 Please read this manual before you start to install the luminaire.
- 02 The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations of the national requirements.
- 03 Switch OFF the power supply before the installation or maintenance to avoid electrical shock.
- 04 The luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur, Chlorine, Phthalates, etc., are present.



Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license

3241 660 33633

© 2023 Signify Holding
©ignify