



Strong contacts. Clever technology.

Technical Data Sheet

Connection section, stainless steel no. 113, 40 mm

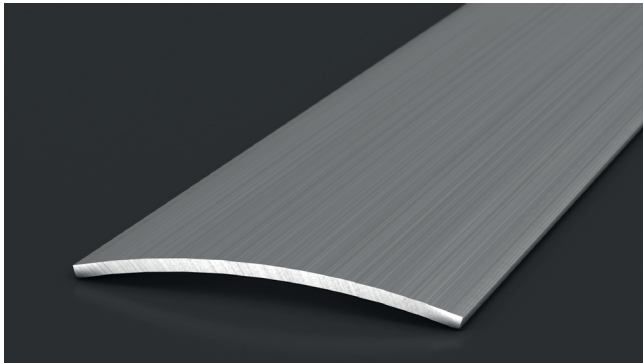

Connection sections create transitions between almost any level of flooring.

The profiles are available in a wide range of shapes, materials and colors and can be laid quickly and easily.

- > Stainless steel, non-corrosive, material 4016 III d (V2A).
- > Auto-adhesive.
- > Brushed surface.

Material: 1.4016 DIN EN 10088-2
 Non-standardised description: Stainless steel, V2A
 Material condition: 2G ground,
 grain 180 ref. to DIN EN 10088-2

Adhesive
 hotmelt adhesive (synthetic rubber-based)
 Viscosity: 10.000 +/- 3.000 mPa.s (170°C)
 (Brookfield RVT DV-II, Sp 27 ASTM D 3236)
 FDA state: acc. to § 175.105 Adhesives
 Protection: covered with silicone paper

Suitable for:

Elastic floor coverings, Textile floor coverings

Installation method:

gluing

Lengths:

270 / 100 cm

Surface:

Stainless steel brushed