



Strong contacts. Clever technology.



## Technical Data Sheet

### PROFI-DESIGN connection section no. 322, 27 mm

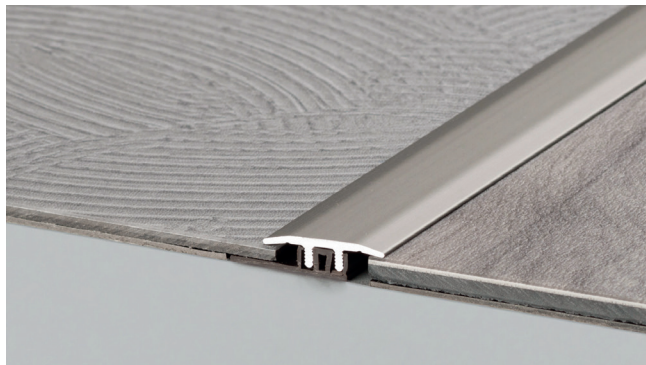

The new Prinz PROFI-DESIGN section system was specially developed for floating installation of design floorings, 4 mm thick and above. The curved-toothed tie-bars of the top section snap safely in the trapezoidal slots of the base section. This enables the top section to tilt easily and to adapt automatically to the height and inclination of the floor covering.

As required, the top sections can be removed and then re-anchored in the base section.

The discreet and shallow top sections skilfully draw attention to the floor design while providing ample room for the extension joints.

- > Two-part clip profile system consisting of aluminium top section and PVC base section.
- > For installation heights from 4-7.5 mm.
- > For connections of equal height or for the compensation of differences in level up to 3 mm.
- > Including base section.

TÜV certification no. 44 780 14206207  
DBGM 20 2012 102 304.0



#### Upper section (Aluminium)

Material:	EN AW 6063	DIN EN 573
Material condition:	T6	DIN EN 755-2
Pre-treatment:	E6	DIN EN 17 611
Anodised layer thickness:	Class 15	DIN EN 17 611

#### Base section (Kunststoff)

Material:	rigid PVC	
Density:	1,44 g/cm <sup>3</sup>	DIN 53 479
Flexural stress:	71,6 N/mm <sup>2</sup>	DIN 53 452
Notched impact strength:	18 mJ/mm <sup>2</sup>	DIN 53 452
Fire behaviour:	B1 (hardly inflammable)	

#### Included:

PVC base section

#### Suitable for:

Design flooring / LVT

#### Installation method:

clip-on

#### Lengths:

270 / 100 / 90 cm

#### Colour selection:

gold / sahara / silver / bronze / stainless steel matt / stainless steel polished / Stainless steel brushed